
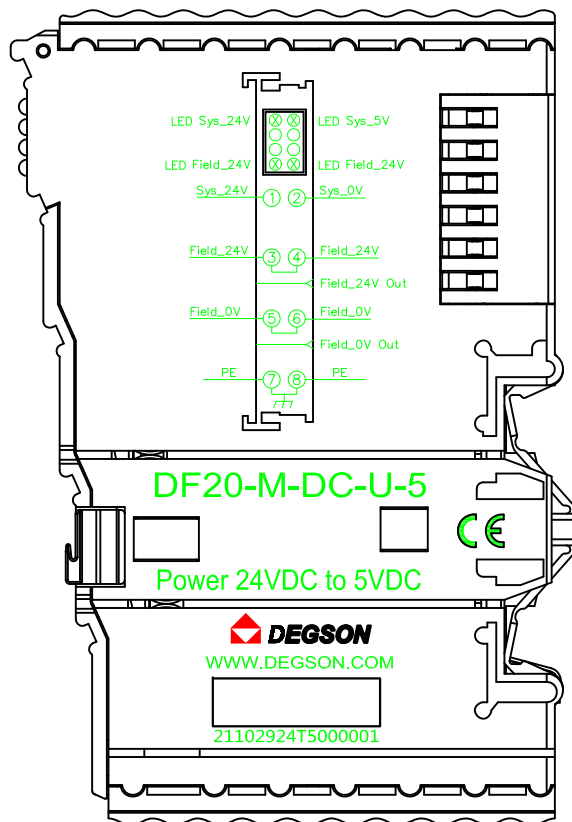


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。未经明确授权，严禁复制或传播。本公司保留对涉及发明、实用新型和外观设计的所有权利。

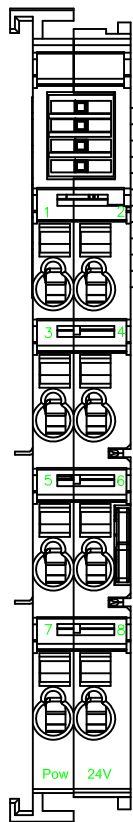

尺寸公差(mm)					0.05/10 ±T*
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

系统电源 (电源输入/电源输出):	24VDC(18-36V) 5V DC/0.75A
公共端电源(电源输入/额定电流):	24V DC(±20%) 5A
隔离耐压:	500V
振动测试:	符合EN60068-2-6标准
冲击测试:	符合EN60068-2-27标准
电磁兼容测试:	符合EN61000-4标准
防护等级:	IP20
工作温度:	-25~+60℃
存储温度:	-40~+85℃
相对湿度:	95%, 无冷凝
尺寸规格:	100mm*12mm*67mm
印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, ect	

条形码备注及示例:

条形码区域为长方形区域:

21102924T5000001

生产日期

型号

流水码

MATERIAL:	/	SURFACE:	/
MAT.NO.:	30050000334	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:		Description:	
CHKD:		DF20-M-DC-U-5	
DRFT:	luo DP 2021.08.31	DRAWING NO.:	200039584
REV	ECN	DESCRIPTION	DRFT
			DATE
			SIZE: A4
			TYPE: PRODUCT DRAWING
			SCALE: 1:1
			SHEET 1/1