
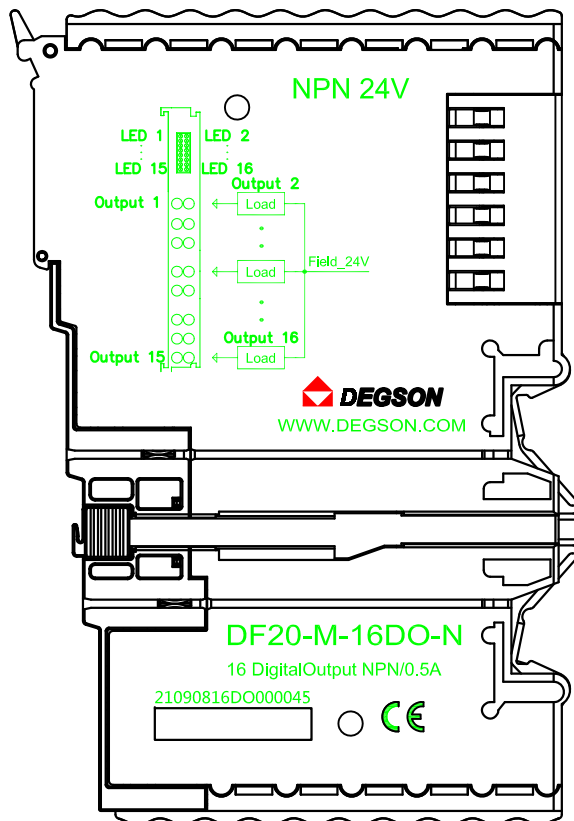


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。本公司保留对专利及发明、实用新型和外观设计的所有权利。

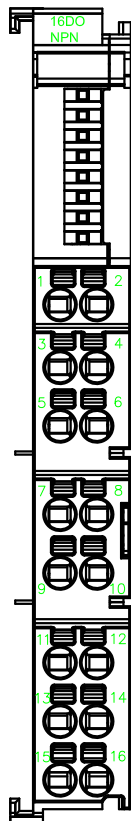


尺寸公差(mm)				
0	>30	>60	>100	>150
~30	~60	~100	~150	
±0.20	±0.30	±0.50	±0.70	±1.00

输出通道:	16
系统电源(输入电压/电流消耗):	5VDC/90mA
公共端电源(输入电压/允许范围):	24V DC(±20%)
输出信号类型:	NPN
输出额定电压:	0V DC
输出电流:	单通道500mA
负载类型:	阻性、感性、灯负载
模块故障报警:	支持
隔离耐压:	500V
振动测试:	符合EN60068-2-6标准
冲击测试:	符合EN60068-2-27标准
电磁兼容测试:	符合EN61000-4标准
防护等级:	IP20
工作温度:	-25~+60℃
存储温度:	-40~+85℃
相对湿度:	95%, 无冷凝
尺寸规格:	100mm*12mm*67mm

印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking, printing content is clear ,no broken line,ect

条形码备注及示例:

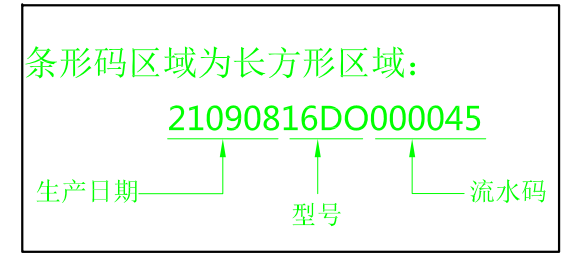

MATERIAL:	/	SURFACE:	/
MAT.NO.:	30050000278	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	Description:	
APPD:		DF20-M-16DO-N	
CHKD:		DRAWING NO.:	200015723
DRFT:	luo DP 2021.08.31	REV:	00
SIZE:	A4	TYPE:	PRODUCT DRAWING
SCALE:	1:1	SHEET:	1/1

REV	ECN	DESCRIPTION	DRFT	DATE