
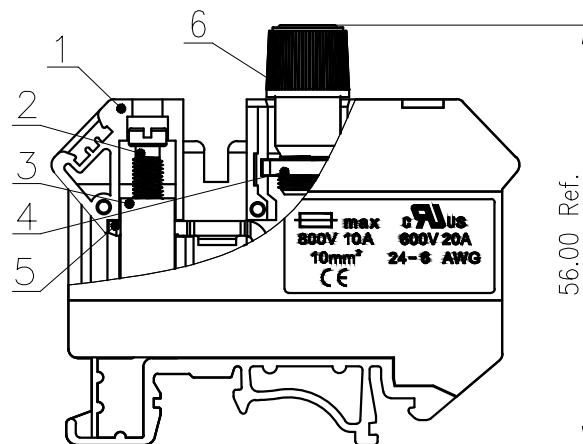

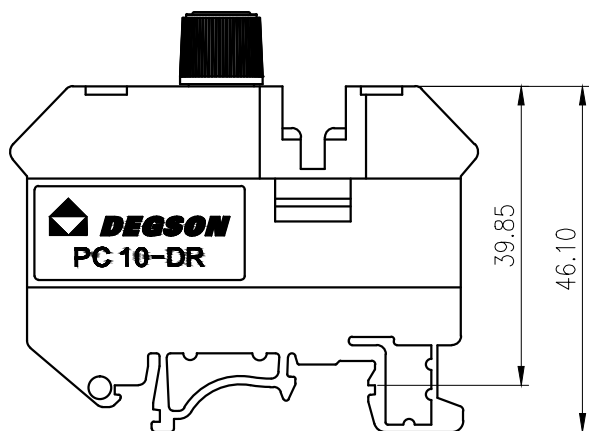


未注公差/General tolerances(mm)													0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

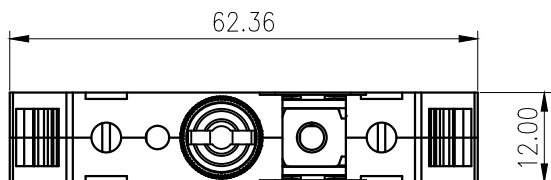

ITEM	NAME OF PART	MATERIAL	NOTES	
6	Fuse Housing			
5	Double Hole Current	Copper	Sn Plated	
4	Single Hole Current	Copper	Sn Plated	
3	Cage	Copper Alloy	M4/Ni Plated	
2	Screw	Copper Alloy	M4/Ni Plated	
1	Housing	PA66	UL94V-0	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		600/10	600/10	600/5
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)		800/10	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8.0	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M4, 1.2/10.5		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)		0.5~10mm² 24~6AWG		
间距/Pitch(mm)		12.0		
剥线长度/Stripping length(mm)		10~11		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number: PANTONE / RAL		/		

MATERIAL:		SURFACE:			
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD NAME: PC10-DR-01P-1Y-00A(H)			
STATUS:	/				
APPD:	Li GL 2020.06.04				
CHKD:	Mao J 2020.06.04				
DRFT:	LIUM 2008.03.15	DRAWING NO.:	PC10-DR-C01	REV	T1
SIZE: A4		TYPE: CUSTOMER DRAWING		SCALE: 1:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE