
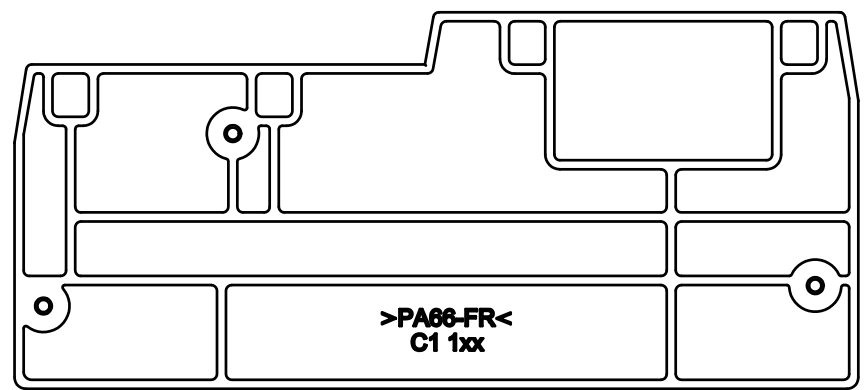
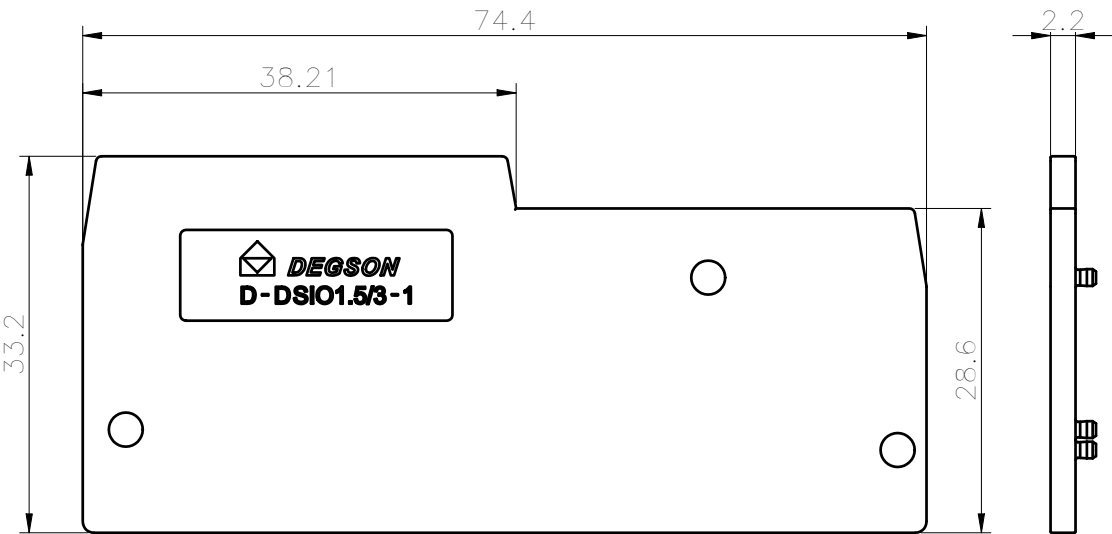
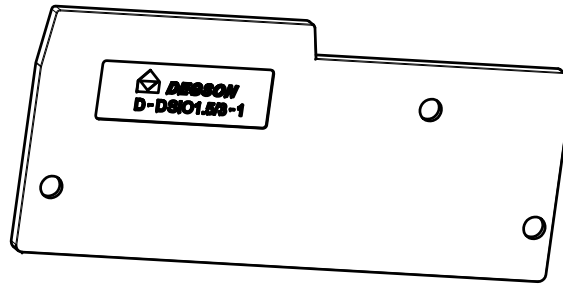


未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. All rights reserved for patent, utility model or designs registrations. 非经明确授权, 否则禁止转让、复制、利用、交还本文件的内容。 一经发现侵权, 请及时通知, 否则保留对侵权者追究法律责任。 实用型专利和外观设计专利的所有权利。



使用温度范围/Operating temperature(°C)	-40~+105
符合 RoHS 环保要求/Conform to RoHS	Yes
阻燃等级/Flame class	UL94V-0

DEGSON		MATERIAL: PA66	SURFACE: /
		MAT. NO./REV: /	MAT STATUS: /
APPD: Peng M	2022.06.07	NAME	
CHKD: Gao WG	2022.06.07	D-DSIO1.5/3-1-01P-1Y-00A(H)	
DRFT: Chen KZ	2022.06.07	DRAWING NO. /	TYPE CUSTOMER DRAWING
REV	ECN	DESCRIPTION	DRAWING STATUS /
00	/	/	SCALE 1.5:1
		DRFT Chen KZ	SHEET 1/1

00	/	/	Chen KZ	2022.06.07
REV	ECN	DESCRIPTION	DRFT	DATE

