


### ◆ 16 channel /0VDC /voltage distribution (DF20-M-DC-U-0)

- Application and connection type independent of fieldbus.
- Provides 16 channel 0VDC voltage rating for external field.
- Protection level IP20.

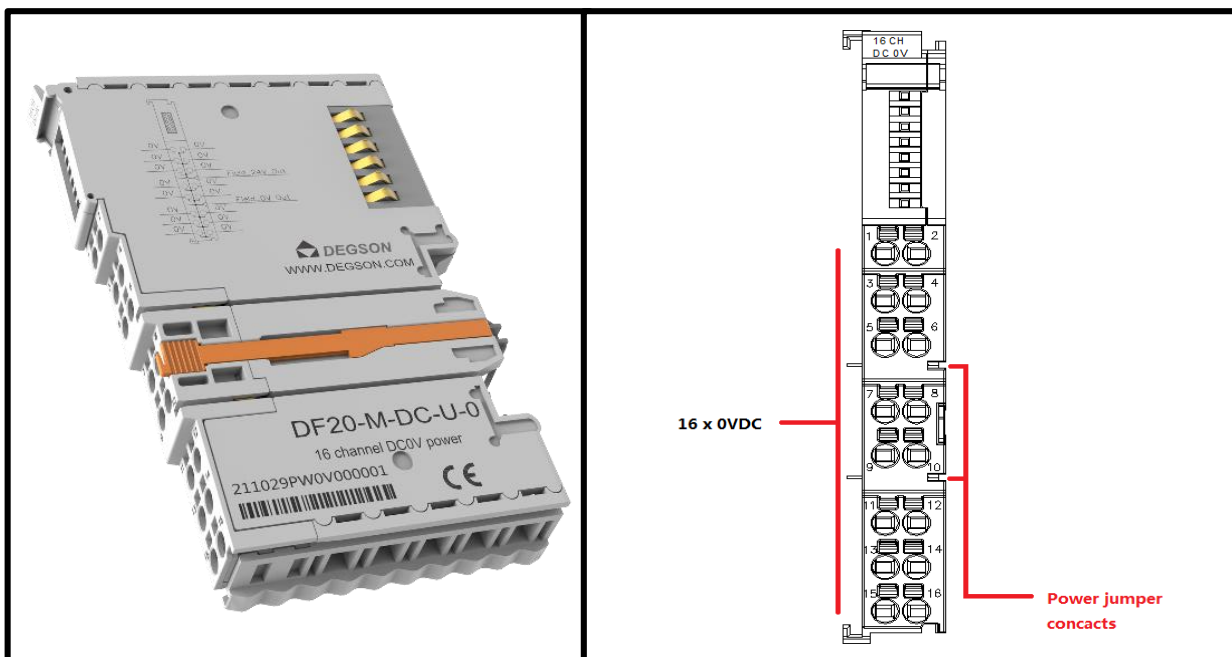


## 1. Specification

<b>Technical data</b>	
Number of channels	16
Working voltage	0VDC via power jumper contacts
Supply field voltage	0VDC
Supply field current (MAX)	5A
Number of incoming power jumper contacts	2
Number of outgoing power jumper contacts	2
<b>Connection data</b>	
Connection technology: inputs / outputs	16 x via pluggable connector
Connection type 1	Inputs/Outputs
Area of wire	0.2~1.5mm <sup>2</sup> /28~16AWG
Strip length	8~9mm/0.31~0.35inches
Mounting type	DIN-35 RAIL
<b>Material Data</b>	
Color	light gray
Housing material	Polycarbonate; polyamide 6.6
Conformity marking	CE
<b>Environmental requirements</b>	
Ambient temperature (operation)	-25~60°C
Surrounding air temperature (storage)	-40~85°C
Protection type	IP20
Pollution degree (5)	2, Per IEC 61131-2
Operating altitude	without temperature derating: 0~2000m
Mounting position	Any
Relative humidity (without condensation)	5~95%RH
Vibration resistance	4g, Per IEC 60068-2-6
Shock resistance	15g, Per IEC 60068-2-27
EMC immunity to interference	Per EN 61000-6-2
EMC emission of interference	Per EN 61000-6-3
Exposure to pollutants	Per IEC 60068-2-42 and IEC 60068-2-43
Permissible pollutant concentration H <sub>2</sub> S at a relative humidity < 75%	10ppm
Permissible pollutant concentration SO <sub>2</sub> at a relative humidity < 75%	25ppm


## 2. Hardware Interface

### ● Wiring Terminal

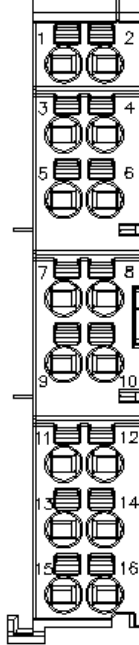

No.		Signal	Description
1	2	Field power supply 0VDC	Provides 16 channel 0VDC voltage rating for external field.
3	4		
5	6		
7	8		
9	10		
11	12		
13	14		
15	16		

● **Wiring**

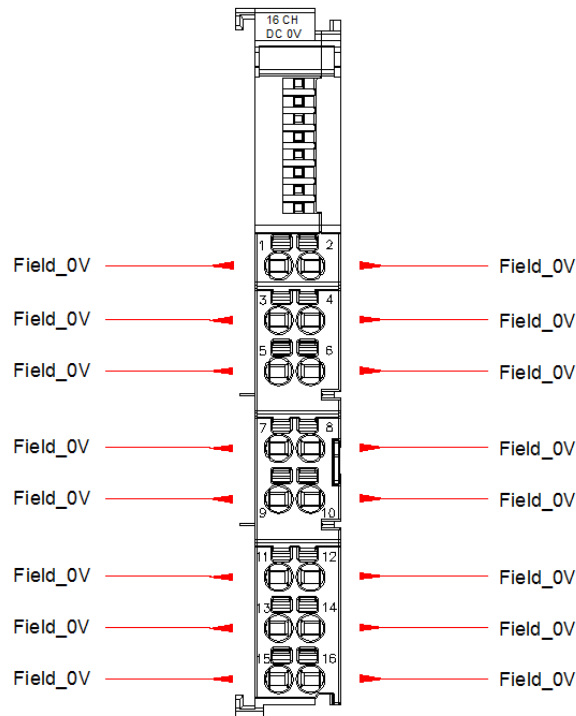

As shown in the picture:

Provides 16 channel 0VDC voltage rating for external field.

**3.Machinery installation**

● **Dimension drawing**

The installation size is shown in the following figure (unit: mm):

