

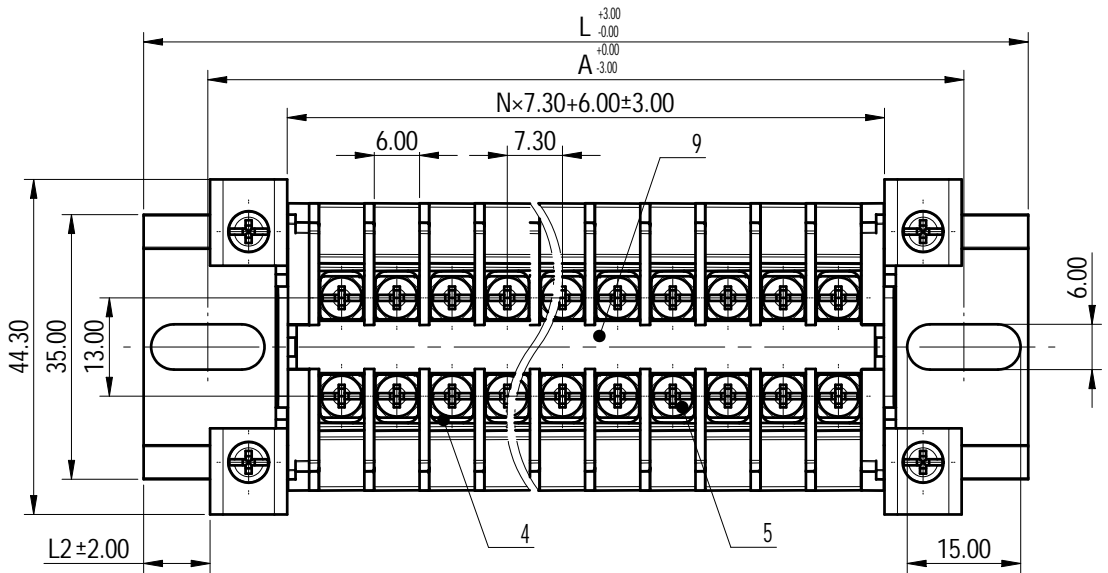


(W/O COVER VIEW)

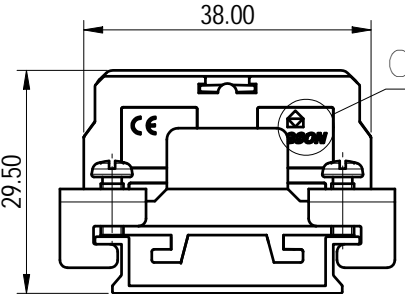

未注公差/General tolerances (mm)												0.1/10		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

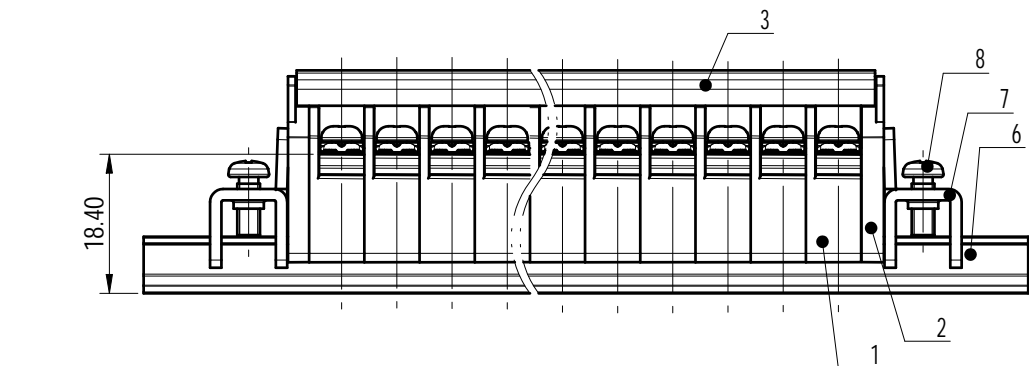

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
9	Tag	PVC	UL94V-2
8	Screw 2	Steel	Zn Plated
7	Fastener	Steel	Zn Plated
6	Tramroad	AL	/
5	Screw 1	Steel	Zn Plated
4	Current carrier	Copper alloy	Ni Plated
3	Cover	PC	UL94V-0
2	Housing 2	PC	UL94V-0
1	Housing 1	PC	UL94V-0

POLES	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
L	57	57	57	77	77	97	97	97	117	117	117	137	137	157	157	157	177	177	177	197	197
A	40	40	40	60	60	80	80	80	100	100	100	120	120	140	140	140	160	160	160	180	180
L2	11.65	8.00	4.35	10.70	7.05	13.40	9.75	6.10	12.45	8.80	5.15	11.50	7.85	14.20	10.55	6.90	13.25	9.60	5.95	12.30	8.65

UL 标准/UL Standard:	
额定电压/电流/Rated Voltage(V)/Current(A)	600/10(B/C)
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	24~16
间距/Pitch(mm)/线数范围/Poles	7.30/N=01~21P
使用温度范围/Operating temperature(°C)	-40~+125
符合RoHS环保要求/Conform to RoHS	Yes

	MATERIAL:	SURFACE/COLOR:
	MAT NO./REV: / 00	MAT STATUS: 批量
APPD: 蓝贵凡 2024.04.01	NAME	
CHKD: 曹利彬 2024.04.01	DGR10-XXP-1Y-10A&Z(H)	
DRFT: 姜民洁 2024.04.01	DRAWING NO. 200009801	TYPE CUSTOMER DRAWING
	DRAWING STATUS 已发布	SCALE 1:1
		SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			姜民洁	2024.04.01

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. All rights reserved for patent, utility model or design registrations. 非经书面授权, 复制或传播, 或向第三方提供, 或用于任何目的, 均被视为侵权。本公司保留对涉及发明、实用新型和外观设计的所有权利。