




(W/O COVER VIEW)

106.00

未注公差/General tolerances (mm)												0.1/10 /		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

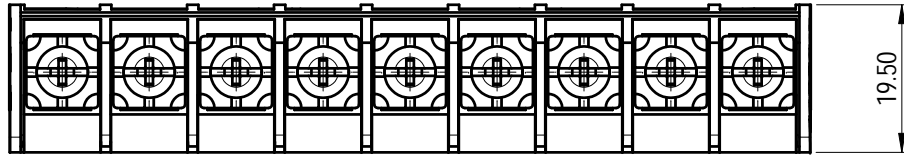



19.50

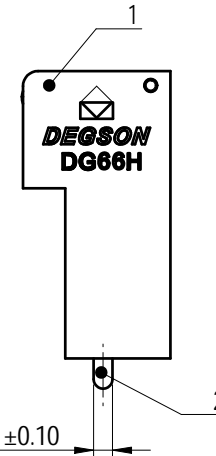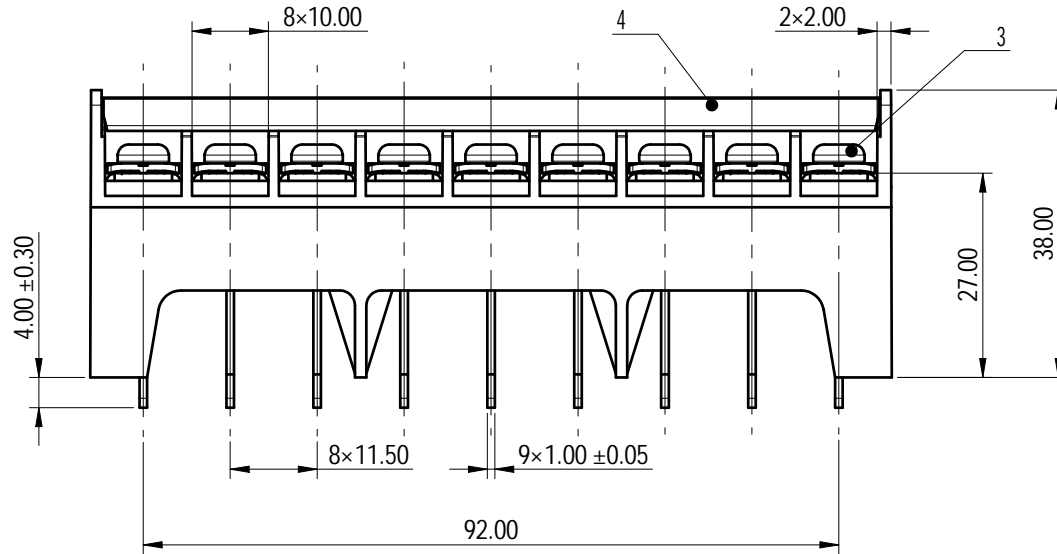

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
4	Cover	PC	UL94V-2
3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PBT+20%GF	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		600/30	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M4, 1.25/11.0		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)		22~10		
间距/Pitch(mm)/线数范围/Poles		11.50/N=09P		
剥线长度/Stripping length(mm)		10~11		
使用温度范围/Operating temperature(°C)		-30~+120		
符合RoHS环保要求/Conform to RoHS		Yes		

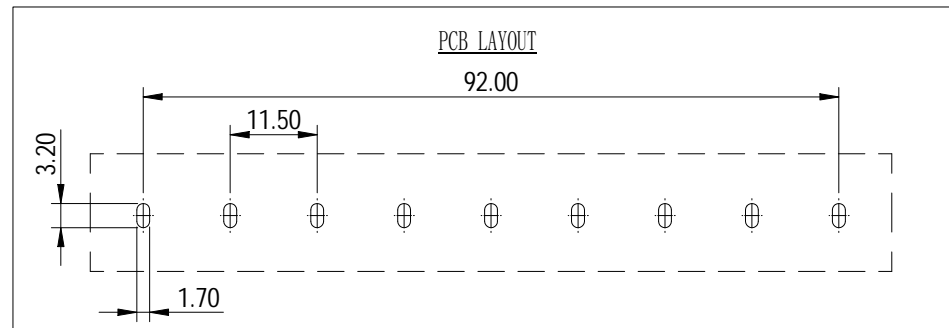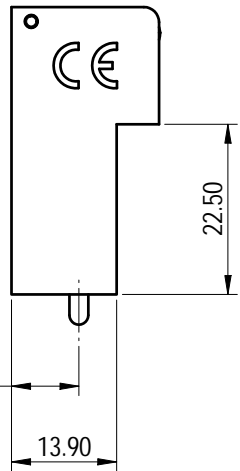

		MATERIAL:	SURFACE/COLOR:		
		MAT NO./REV:	-	/	00
APPD: 蓝贵凡	2023. 11. 14	NAME			
CHKD: 曹利彬	2023. 11. 14	DG66H-B-09P-1Y-00A&Z(H)			
DRFT: 姜民洁	2023. 11. 14	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200250530	CUSTOMER DRAWING	已发布	1:1
					SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless explicitly permitted. Violations will be held for compensation. All rights reserved for patent, utility model or design registrations. 除专利等明确授权外, 否则禁止转让、复制、印刷、流通本文件的所有权。未经明确授权, 擅自复制或传播本文件内容, 一经发现, 必将追究法律责任。