


未注公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

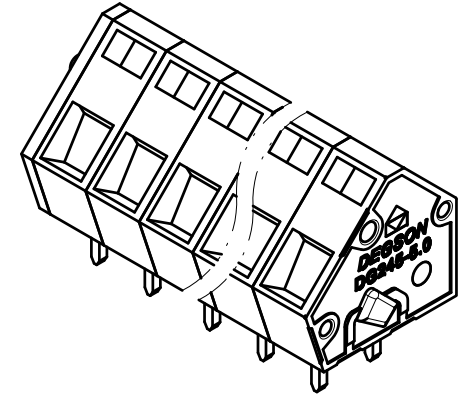

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin header	Copper alloy	Sn plated
3	Housing	PA66	UL94V-0
2	Spring	Stainless steel	/
1	Cover	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	/	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	450/17	/
工频耐压/Withstanding Voltage(V/Min)		AC2500		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		28~12 / 0.2~2.5		
间距/Pitch(mm)/线数范围/Poles		5.0/N=01~24P		
剥线长度/Stripping length(mm)		5~6		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

APPD: 兰春华	2022.08.16
CHKD: 陈招	2022.08.15
DRFT: 龚徐涛	2022.08.15

MATERIAL:		SURFACE/COLOR:	
MAT NO./REV: / 00		MAT STATUS: 批量	
NAME			
DG245-5.0-XXP-1Y-00Z(H)			
DRAWING NO.	TYPE	DRAWING STATUS	SCALE
200102971	CUSTOMER DRAWING	已发布	2:1
SHEET		1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00		原PDM无外部2D, 新出外部2D 00版	龚徐涛	2022.08.15

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by DEGSON. All rights reserved for patent, utility model or design registrations. 除专利权明确标注外, 否则禁止转让、复制、引用、充数等文件的传播。 未经授权, 严禁复制或传播文件。 保留所有权利, 侵权必究。