


公差/General tolerances (mm)												0.1/10		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

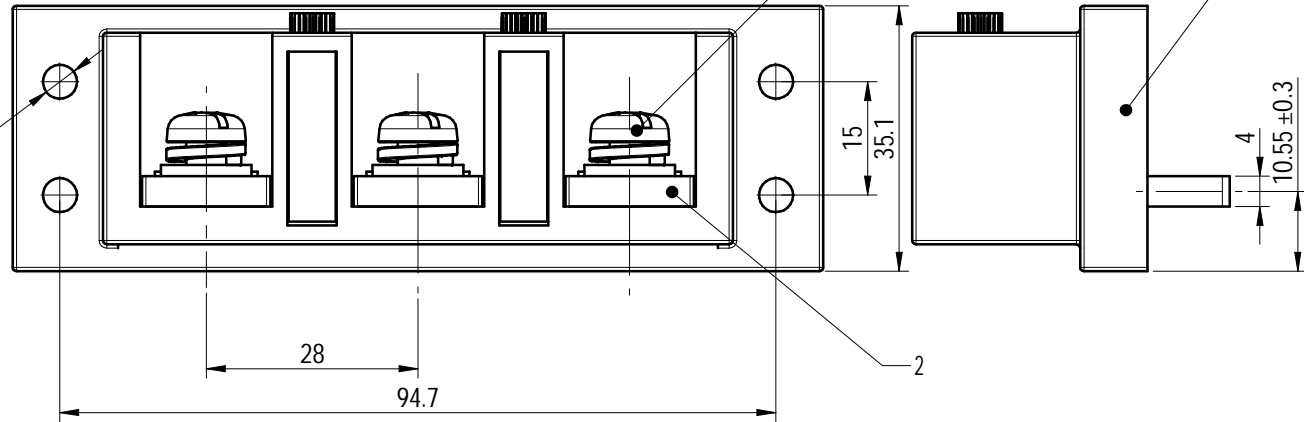

Note: The A&Z(H) in the name means :A(H) and Z(H)

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Brass	/
3	Screw	Steel	M6/Ni plated
2	Current carrier	Brass	M6/Sn plated
1	Housing	PC	UL94V-0
额定电压/电流/Rated Voltage(V)/Current(A)			600/120
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M6, 2.5/22.15
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)			20~2 / 0.52~33.6
间距/Pitch(mm)/线数范围/Poles			28/N=03P
剥线长度/Stripping length(mm)			17~19
使用温度范围/Operating temperature(°C)			-40~+125
符合RoHS环保要求/Conform to RoHS			Yes

		MATERIAL: /		SURFACE/COLOR: /	
		MAT NO./REV: /		MAT STATUS: /	
APPD: 核准人	核准日期	NAME			
CHKD: 审核人	审核日期	DG32-A-03P-1Y-00A&Z(H)			
DRFT: 设计人	设计日期				
DRAWING NO. 200322127		TYPE CUSTOMER DRAWING		DRAWING STATUS /	
SCALE 1:1		SHEET 1/1			

REV	ECN	DESCRIPTION	DRFT	DATE
00	/	/	/	/

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized by Degson. All rights reserved for patent. 未经授权复制或传播本文件内容及本文件中的任何信息均属于侵权行为。