
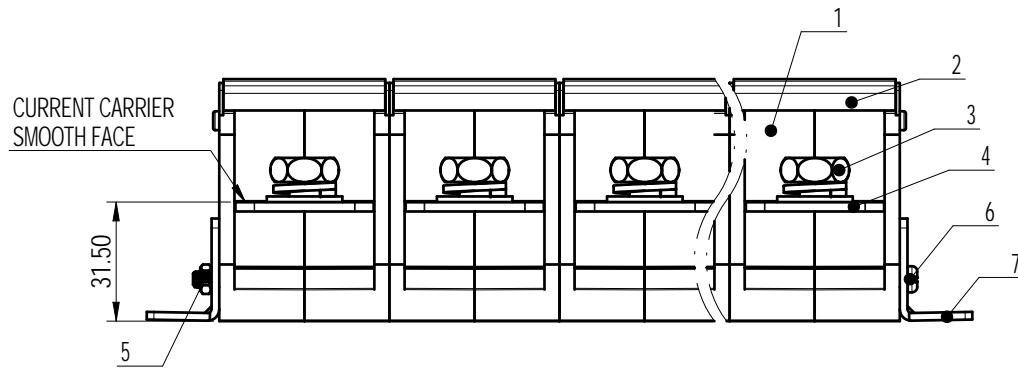

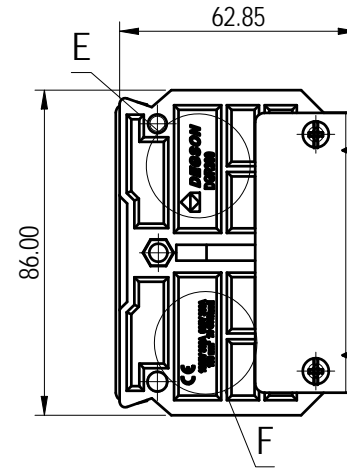


未注公差/General tolerances (mm)													0.1/10	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

(W/O COVER VIEW)

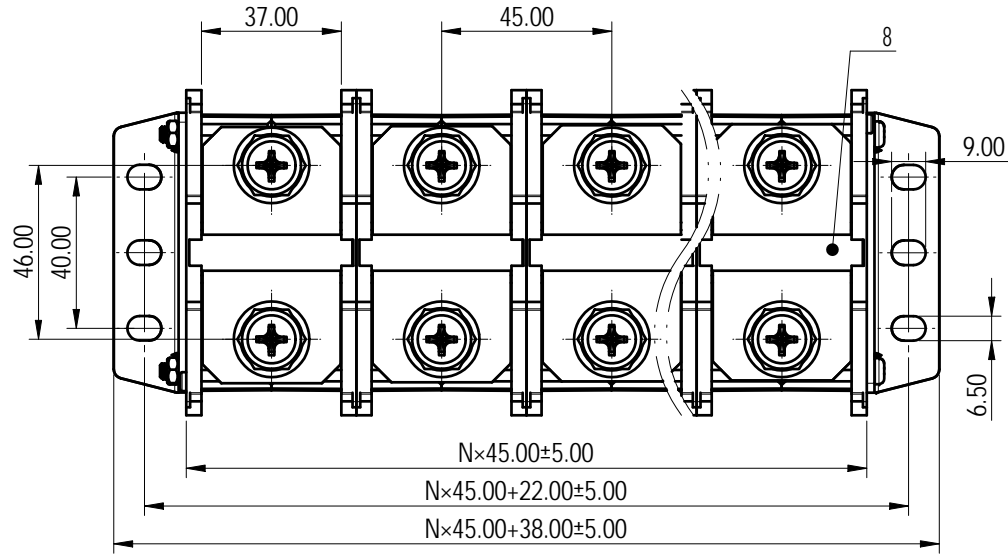

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
8	Tag	PVC	UL94V-0
7	Fastener	Steel	Zn Plated
6	Connect Pillar	Steel	Zn Plated
5	Nut	Steel	Zn Plated
4	Current carrier	Copper alloy	Ni Plated
3	Screw	Steel	Zn Plated
2	Cover	PC	UL94V-0
1	Housing	PC	UL94V-0

UL 标准/UL Standard:	
额定电压/电流/Rated Voltage(V)/Current(A)	600/300
IEC 标准/IEC Standard:	
额定电压/电流/Rated Voltage(V)/Current(A)	1000/300
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M10, 8.9/80
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~300kcmi / 150
间距/Pitch(mm)/线数范围/Poles	45.00/N =01~11P
使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes

		MATERIAL:	SURFACE/COLOR:		
APPD: 彭敏	2024.11.25	MAT NO./REV: / 00	MAT STATUS: 批量		
CHKD: 曹利彬	2024.11.25	NAME			
DRFT: 姜民洁	2024.11.25	DGR300-XXP-1Y-20A&Z(H)			
④	A4	DRAWING NO. 200285605	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by the copyright owner. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权等权利外，本公司保留对涉及发明、实用新型、外观设计、发明专利、软件著作权等权利的所有权利。