

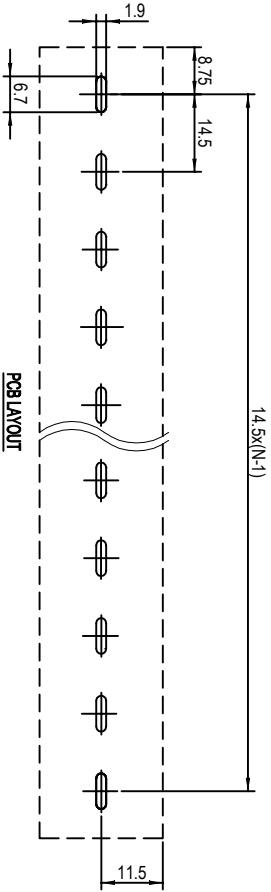
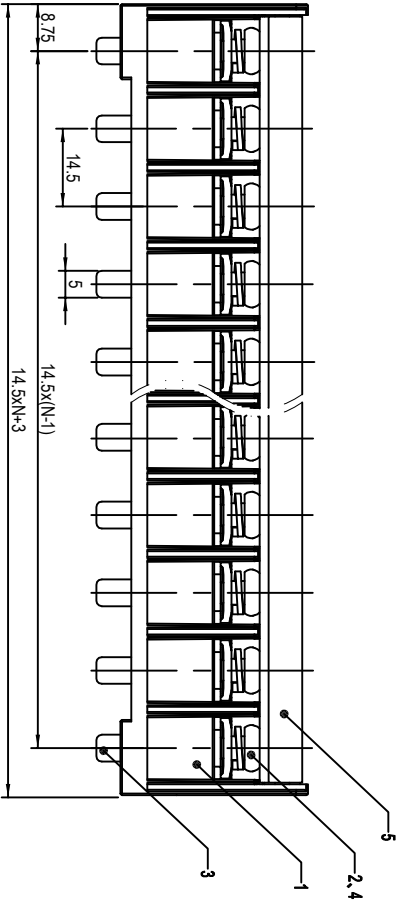


(Without Cover)

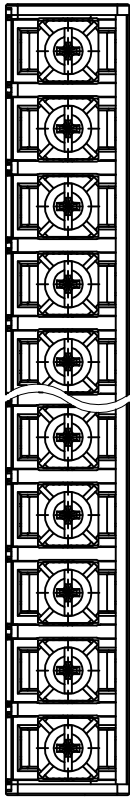

按公差 (General Dimension) (mm)												
0	>-3	>-6	>-10	>-18	>-30	>-50	>-80	>-120	>-180	>-250	>-315	>400
~	~	~	~	~	~	~	~	~	~	~	~	>500
3	6	10	18	30	50	80	120	180	250	315	400	500
±0.12	±0.18	±0.22	±0.28	±0.35	±0.57	±0.71	±0.90	±1.05	±1.15	±1.60	±2.20	±2.50
												0.1/0
												±F

Note: The M&Z (h) in the name means :A(h) and Z(h)

ITEM	NAME OF PART	MATERIAL	NOTES
5	Cover	PC	UL94V-2
4	Nut	Steel	Zn Plated
3	Pin Header	Copper alloy	Sn Plated
2	Screw	Steel	Zn Plated
1	Housing	PBT	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 按标准	UL Standard	B	C
UL 按标准	UL Standard	D	
额定电压	Rated Voltage (V) / Current (A)	3000/50	300/50
额定容量	Rated Capacity (mAh)	3000	300
额定功率	Rated Power (W)	1.5	0.15
额定温度	Rated Temperature (°C)	22~80	0~32
额定寿命	Rated Life (cycles)	~1000	~100
额定重量	Rated Weight (g)	~14.5	~1.45
额定尺寸	Rated Dimensions (mm)	~45	~11.5
额定高度	Rated Height (mm)	~23	~11.5
额定厚度	Rated Thickness (mm)	~4.5	~1.5
额定材料	Rated Material	PBT	UL94V-0
额定认证	Rated Certification	UL	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE	DRWING NO.	TITLE	DRAWING STATUS	SCALE	SHEET
00	/	/	/	/	200822946	CUSTOMER DRAWING	/	1:1	1/1

DATE	BY	CHK	APP	NAME	STATUS
/	/	/	/	/	/