
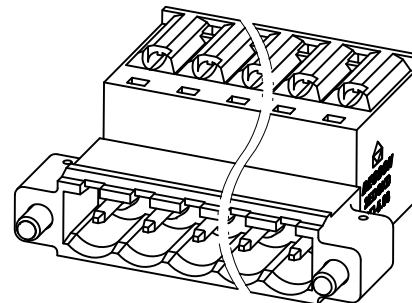


Transfer or duplication of this document as well as the utilization or manufacturing of its contents without the written consent of DEGSON is prohibited. All rights reserved for patent.

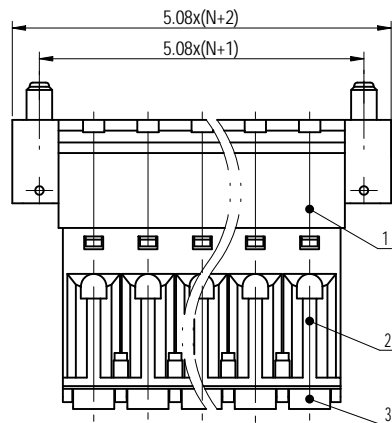





公差/General tolerances (mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±2
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage (V)/Current (A)	300/10	/	300/10

IEC 标准/IEC Standard:	III/3	III/2	II/2
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage (V)/Current (A)	250/12	/	/
额定脉冲电压 (KV)/Rate Impulse Voltage (KV)	4	/	/
线径范围 (硬线和软线)/Wire Range (rigid and flexible) (AWG/mm <sup>2</sup> )	26-12 / 0.2-2.5		
间距/Pitch (mm)/线数范围/Poles	5.08/N=02-16P		
剥线长度/Stripping length (mm)	10		
使用温度范围/Operating temperature (°C)	-40--+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

6	Spring	Stainless steel	/
5	Clamp	Copper alloy	Sn Plated
4	Screw	Steel	M2.5/Zn Plated
3	Button	PA66	UL94V-0
2	Housing	PA66	UL94V-0
1	Cover	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

Note:  
The A&Z(H) in the name means: A(H) and Z(H).

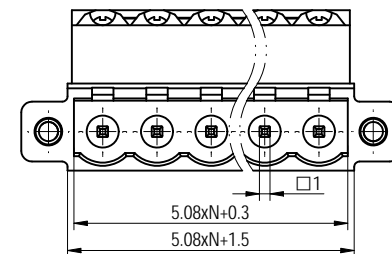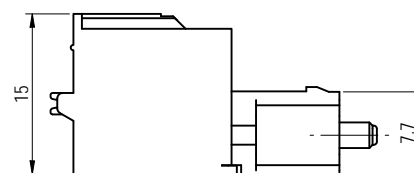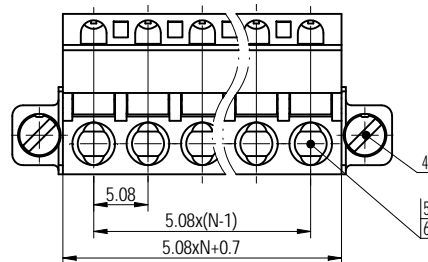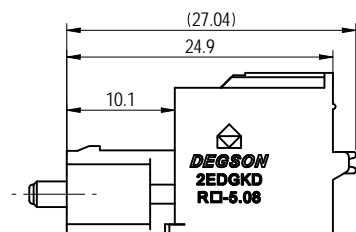

<b>DEGSON</b>		MATERIAL:	SURFACE/COLOR:		
APPD: 兰春华	2023.03.03	MAT NO./REV:	/ 00	MAT STATUS: 批量	
CHKD: 黄耀志	2023.03.01	NAME: 2EDGKDRM-5.08-XXP-1Y-00A&Z(H)			
DRFT: 刘强	2023.03.01	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET
00			对强	2023.03.01	1/1
00			对强	2023.03.01	1/1
		200031011	CUSTOMER DRAWING	已发布	2:1