
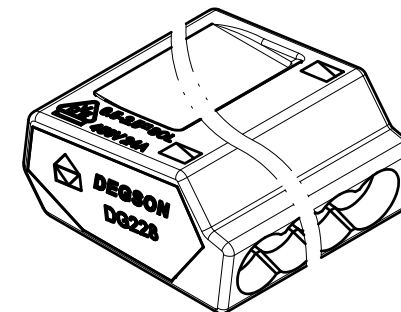
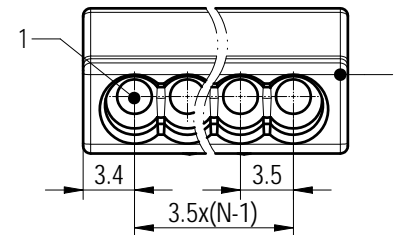


Diagram of a circuit breaker with a DZ logo and specifications: 0.5-2.5mm² 80L 450V 24A.




Diagram of a 0.5-2.5μ SOL 450V 24A circuit breaker. The diagram shows a rectangular device with a handle on the right side. Below the device, the text "0.5-2.5μ SOL" and "450V 24A" is displayed. A small triangle with "100%" inside is located to the left of the text.

Diagram of the identification label (3) showing a diamond symbol, the text "DEGSON DG228", and a height dimension of 9.6.

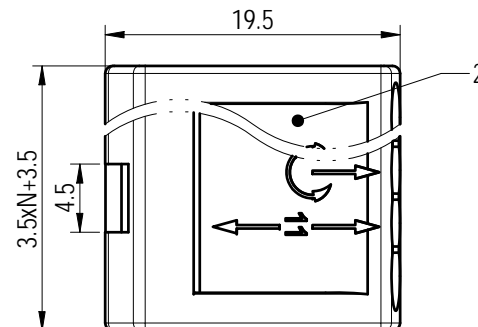

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/15	/	/
VDE标准/VDE Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	450/24	/
工频耐压/Withstanding Voltage(V/1Min)	AC2500		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	22~14 / 0.5~2.5 Sol		
间距/Pitch(mm)/线数范围/Poles	3.5/N=02~05P		
剥线长度/Stripping length(mm)	11~13		
使用温度范围/Operating temperature(°C)	-40~+85		
符合RoHS 环保要求/Conform to RoHS	Yes		

4	Housing	PC	UL94V-2
3	Cover	PC	UL94V-2
2	Spring	Stainless steel	Sn Plated
1	Clamp	Steel	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE/COLOR:	
APPD: 兰春华		MAT NO./REV: / 00		MAT STATUS: 批量	
CHKD: 陈招		NAME			
DRFT: 柳学龙		DG228-3.5-XXP-1Y-00Z (H)			
 A4		DRAWING NO. 200025246		TYPE CUSTOMER DRAWING	
		DRAWING STATUS 已发布		SCALE 2:1	
				SHEET 1/1	

00			柳学龙	2022.09.0
REV	ECN	DESCRIPTION	DRFT	DATE