

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violators will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经许可擅自复制或传播, 否则禁止转让、复制、利用、交加本文件的内容, 一经发现将追究法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.3

2

3

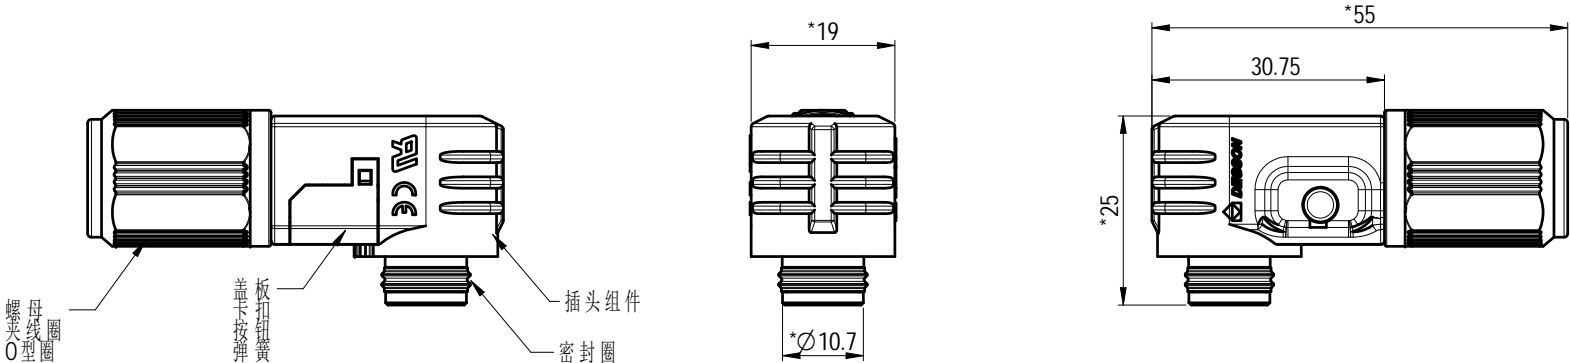
4



5

6

尺寸公差(mm)					0.05/10 ±1°
0 ~ 30	>30 ~ 60	> 60 ~ 100	> 100 ~ 150	> 150	
±0.20	±0.30	±0.50	±0.70	±1.00	±1°

技术要求/Technical requirements:	
额定电压/Rated Voltage/Current	1500V DC / 120A
绝缘电阻/Insulate Resistance	≥5000MΩ
插拔次数/Mechanical working life	100
防护等级/Ingress Protection	IP67 (Mated)
使用温度范围/Operating temperature(* C)	-40~+125
重点管控符号/Key controlled symbol	*
包装规范/Packaging specification	200273828



			MATERIAL:		SURFACE:			
			MAT NO./REV: 28040000330-1 / 00		MAT STATUS: 小批量			
APPD:			NAME					
CHKD:			ESP-120A-25-OR-00-01					
DRFT:			DRAWING NO.		TYPE	DRAWING STATUS	SCALE	SHEET
			200279936			work	1:1	1/1

00	REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6