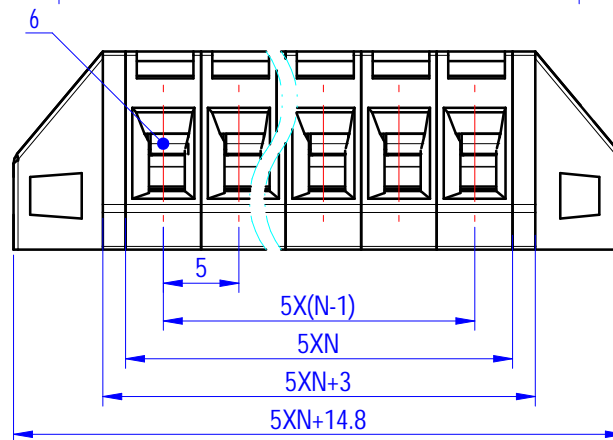
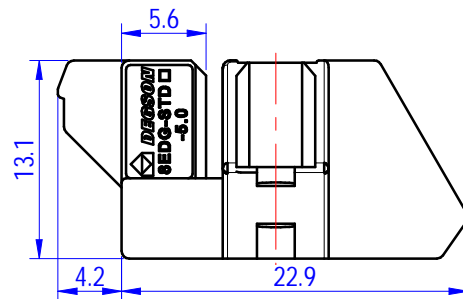
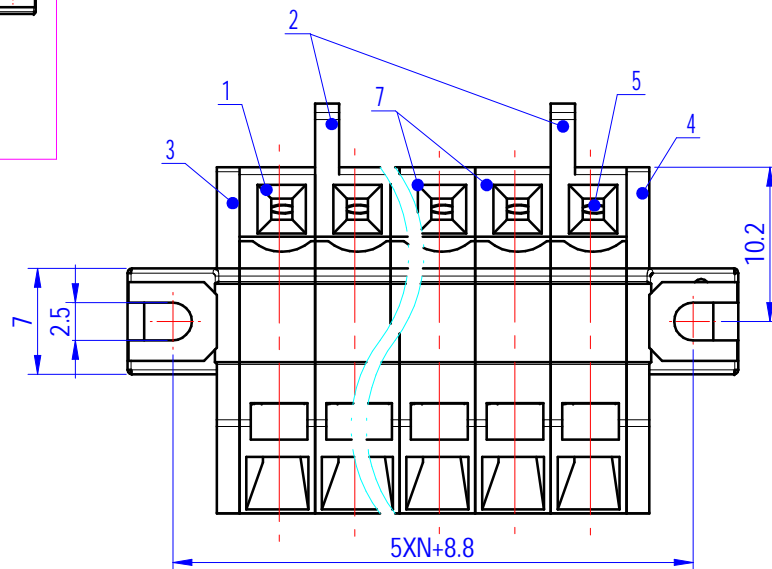

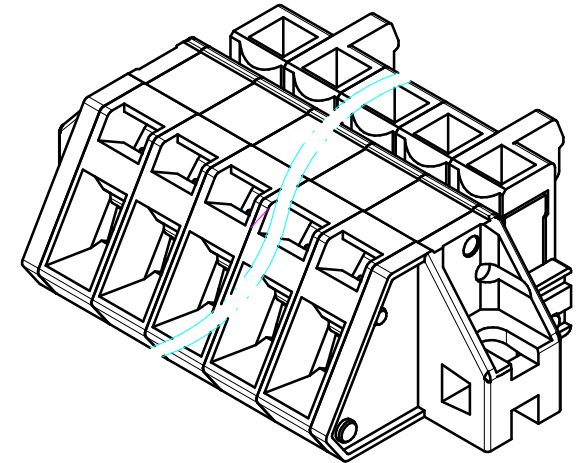


SCALE 1:1






未注公差/General tolerances (mm)														0.1/10 
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	≥2'



7	Housing 3	PA66	UL94V-0
6	Spring	Stainless steel	/
5	Clamp	Copper alloy	Sn Plated
4	Cover 2	PA66	UL94V-0
3	Cover 1	PA66	UL94V-0
2	Housing 2	PA66	UL94V-0
1	Housing 1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard			
过压类别/Overvoltage Category/污染等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	320/20	/	/
额定脉冲电压 (KV)/Rate Impulse Voltage(KV)	4	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	22~ 14/ 0.2~ 2.5		
间距/Pitch(mm)/线数范围/Poles	5.0/N= 02~ 24P		
剥线长度/Stripping length(mm)	7~ 8		
使用温度范围/Operating temperature(°C)	-40~ + 105		
符合 RoHS 环保要求/Conform to RoHS	Yes		

 DEGSON		MATERIAL:		SURFACE/COLOR:		
		MAT NO./REV: 10020003182-1 / 01		MAT STATUS: 批量		
APPD: 兰春华	2024.10.11	NAME 8EDG-STDBM-5.0-XXP-1Y-00A (H)				
CHKD: 陈招	2024.10.11					
DRAFT: 牛泰	2024.10.11	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 A4	 mm (inch)	200312871	CUSTOMER DRAWING	已发布	2:1	1/2

00			牛泰	2024.10.11
REV	ECN	DESCRIPTION	DRFT	DATE