


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 保密性予以维持。未经明确书面许可，不得复制和传递本文件的全部或部分内容。违者将对由此造成的损失承担赔偿责任。版权所有，包括但不限于发明专利、实用新型或外观设计专利的所有权利。


未注公差/General tolerances(mm)													
0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50


0.1/10 ±2°

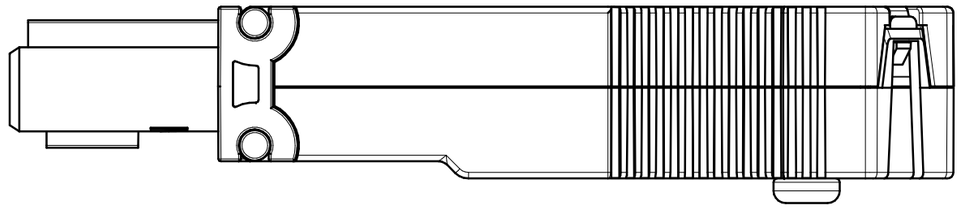

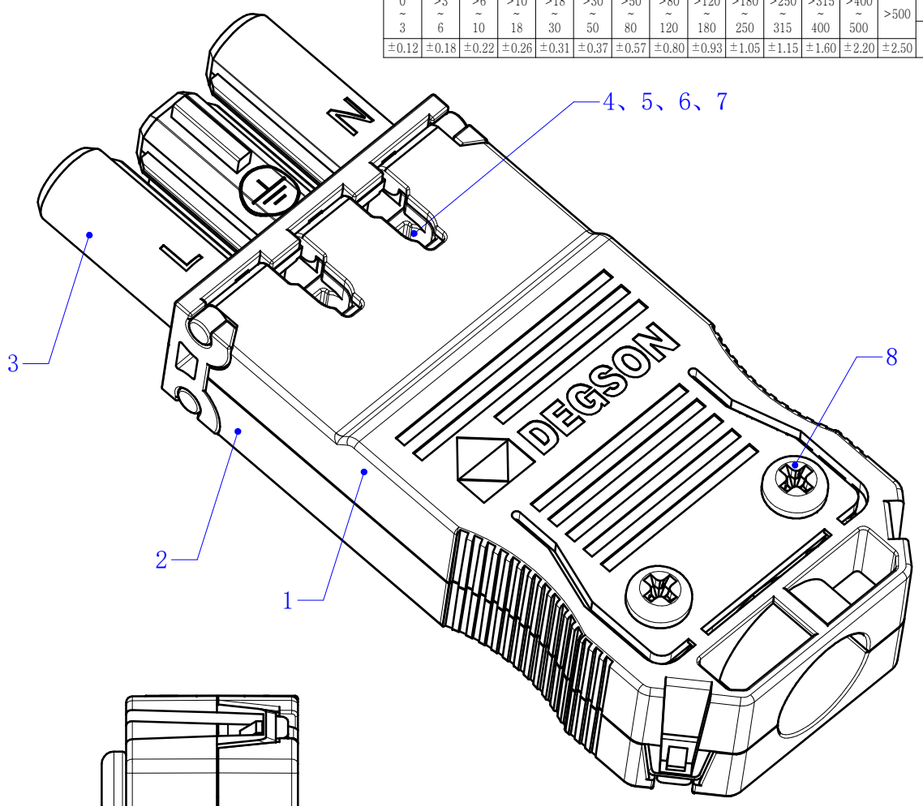

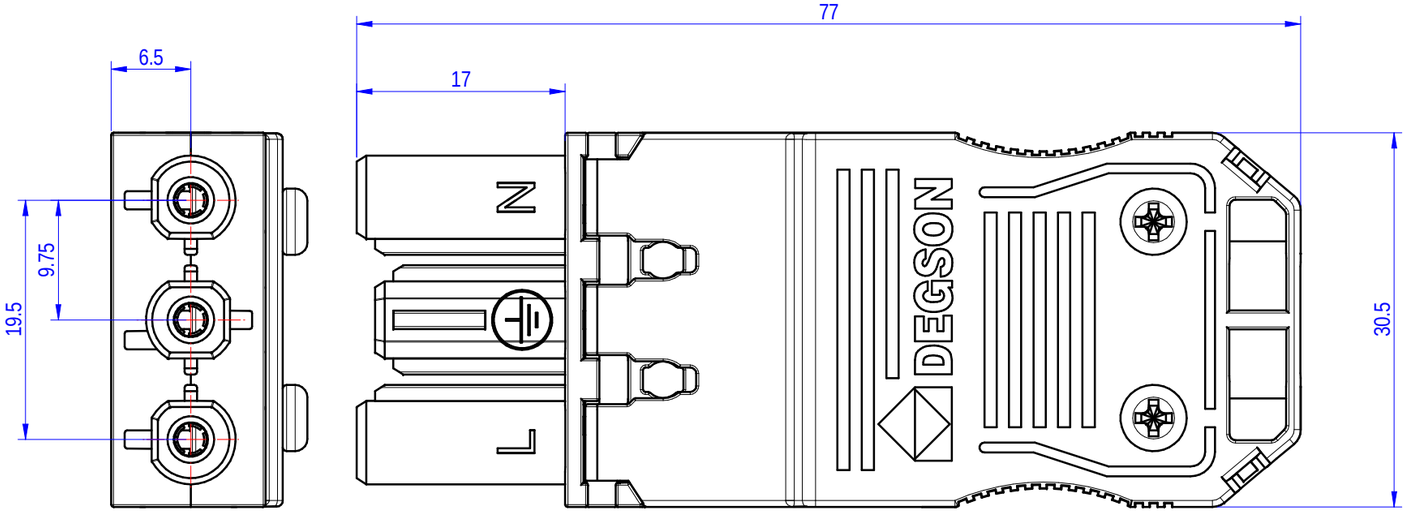

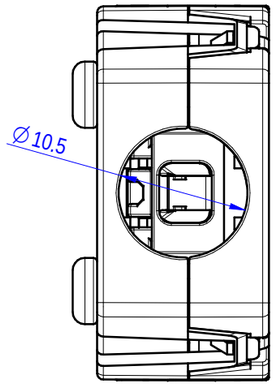

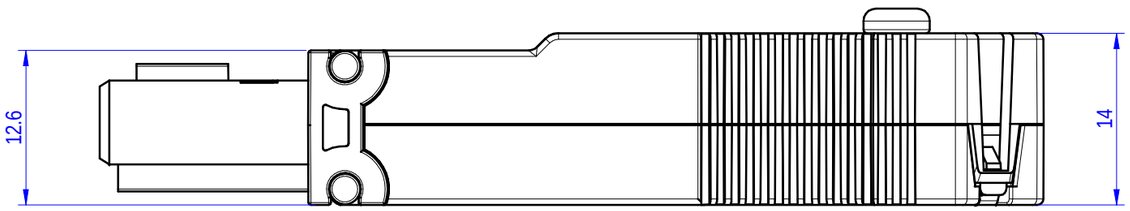

ITEM	NAME OF PART	MATERIAL	NOTES
8	Screw	Steel	Zn plated
7	Button	PA66+GF	UL94V-0
6	Spring	Stainless steel	/
5	Female pin	Copper alloy	Sn Plated
4	Cover	PA66+GF	UL94V-0
3	Housing	PA66+GF	UL94V-0
2	Bottom cover	PA66	UL94V-0
1	Top cover	PA66	UL94V-0

UL 标准/UL Standard: (UL1977)	
额定电压/电流/Rated Voltage(V)/Current(A)	600V/20A
IEC 标准/IEC Standard:(IEC61535)	
额定电压/电流/Rated Voltage(V)/Current(A)	250/400V,32A
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4
螺丝扭矩/Torque Tightening(N· m/Lb.in)	ST2.9, 1.0/8.8
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~12 / 0.5~4
间距/Pitch(mm)/线数范围/Poles	9.75/N=03P
剥线长度/Stripping length(mm)	10~11
使用温度范围/Operating temperature(°C)	-40~+105

REV	ECN	DESCRIPTION	DRFT	DATE
00	/		泛德荣	2025.05.12

DEGSON

APPD:	蓝贵凡	2025.05.12
CHKD:	朱伟明	2025.05.12
DRFT:	泛德荣	2025.05.12

A3 (mm) (inch)

MATERIAL: / SURFACE/COLOR: /

MAT NO./REV: / /00 MAT STATUS: /

NAME: DGBSC-PG01F/4-03P-1Y-00Z(H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200344614	CUSTOMER DRAWING	/	2:1	1/1