


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经书面授权，否则禁止本文件的传送、使用或其内容的泄露。违反者应赔偿损失。本公司保留对外观专利、实用新型或设计注册的所有权利。


未注公差/General tolerances(mm)


0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

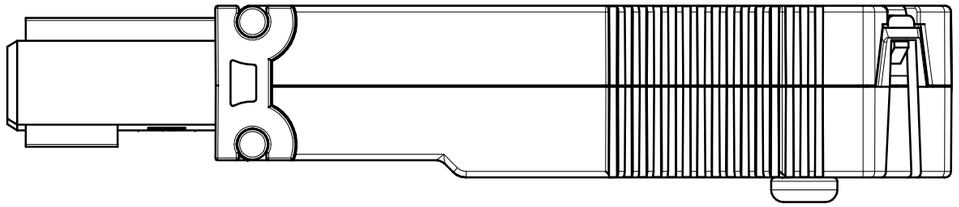


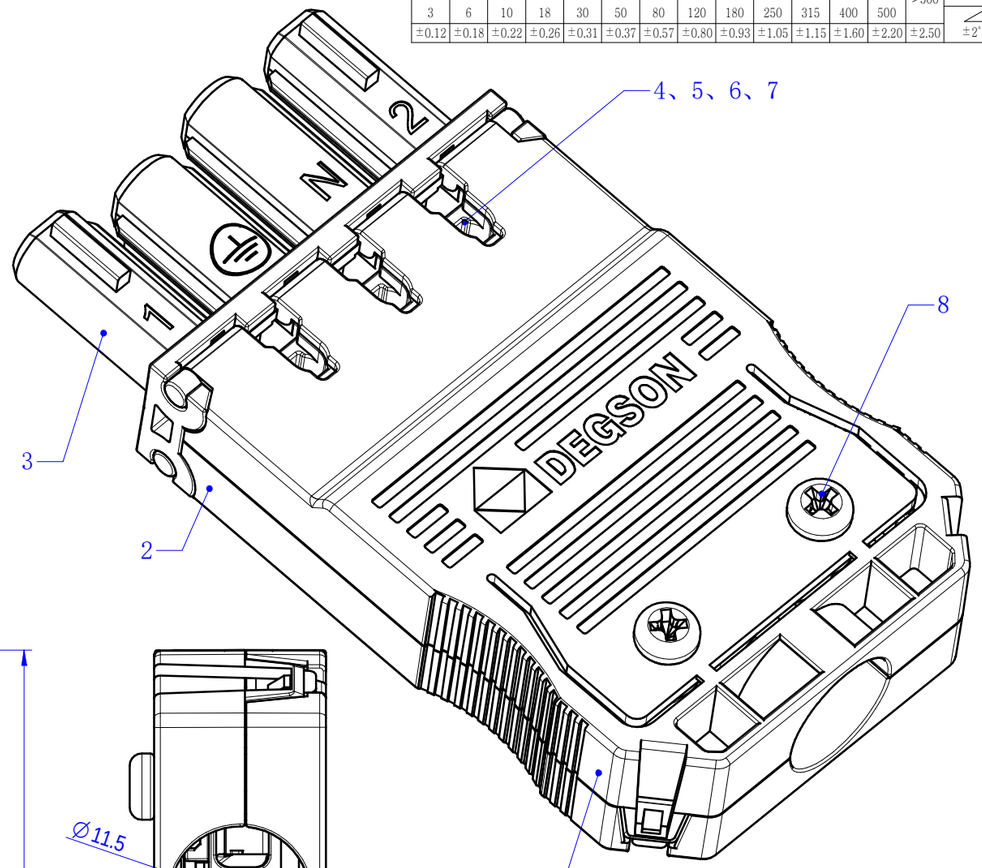

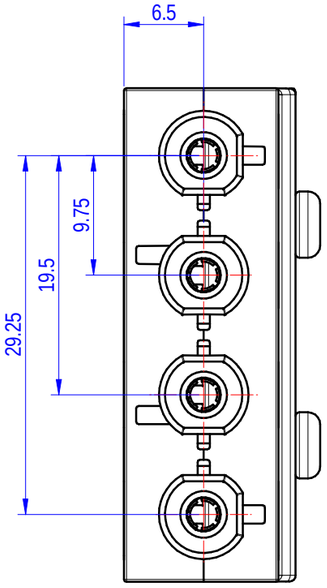

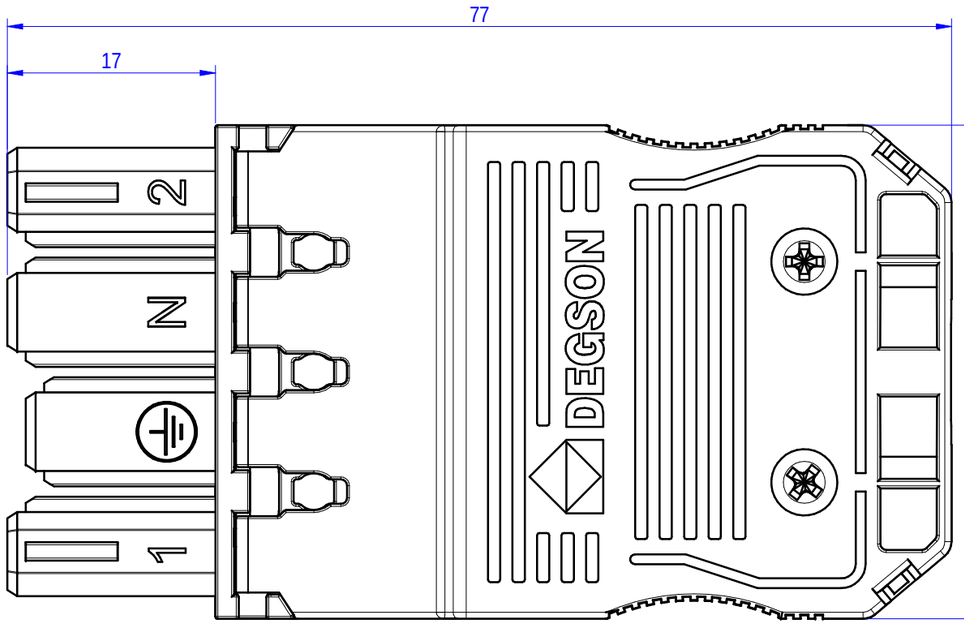

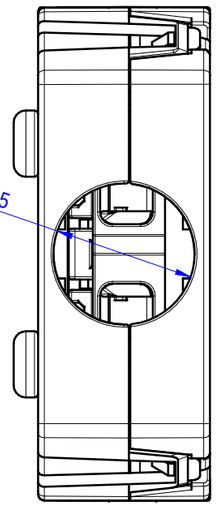

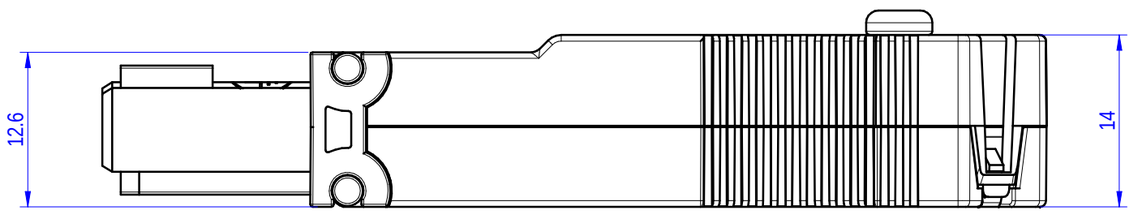

8	Screw	Steel	Zn plated
7	Button	PA66+GF	UL94V-0
6	Spring	Stainless steel	/
5	Female pin	Copper alloy	Sn Plated
4	Cover	PA66+GF	UL94V-0
3	Housing	PA66+GF	UL94V-0
2	Bottom cover	PA66	UL94V-0
1	Top cover	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard: (UL1977)	
额定电压/电流/Rated Voltage(V)/Current(A)	600V/20A
IEC 标准/IEC Standard:(IEC61535)	
额定电压/电流/Rated Voltage(V)/Current(A)	250/400V,32A
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4
螺丝扭矩/Torque Tightening(N· m/Lb.in)	ST2.9, 1.0/8.8
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~12 / 0.5~4
间距/Pitch(mm)/线数范围/Poles	9.75/N=04P
剥线长度/Stripping length(mm)	10~11
使用温度范围/Operating temperature(°C)	-40~+105

REV	ECN	DESCRIPTION	DRFT	DATE
00	/		泛德荣	2025.05.12

DEGSON

APPD:	蓝贵凡	2025.05.12
CHKD:	朱伟明	2025.05.12
DRFT:	泛德荣	2025.05.12

A3 mm (inch)

MATERIAL: / SURFACE/COLOR: /

MAT NO./REV: / /00 MAT STATUS: /

NAME

DGBSC-PG01F/4-04P-1Y-00Z(H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200344621	CUSTOMER DRAWING	/	2:1	1/1