


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 保密性予以维持。禁止复制本文件的内容，禁止将本文件的内容泄露给第三方，违反者将赔偿损失。本公司保留对外申请专利的所有权利。


未注公差/General tolerances(mm)													
0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50


0.1/10 ±2°

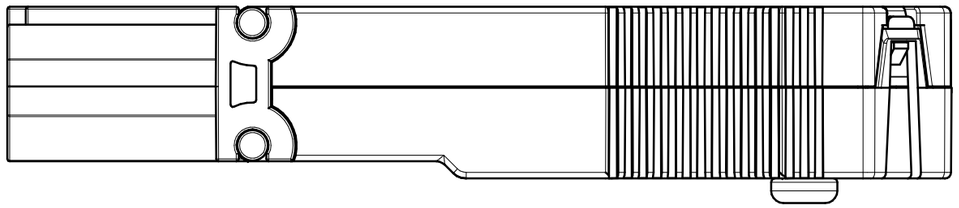


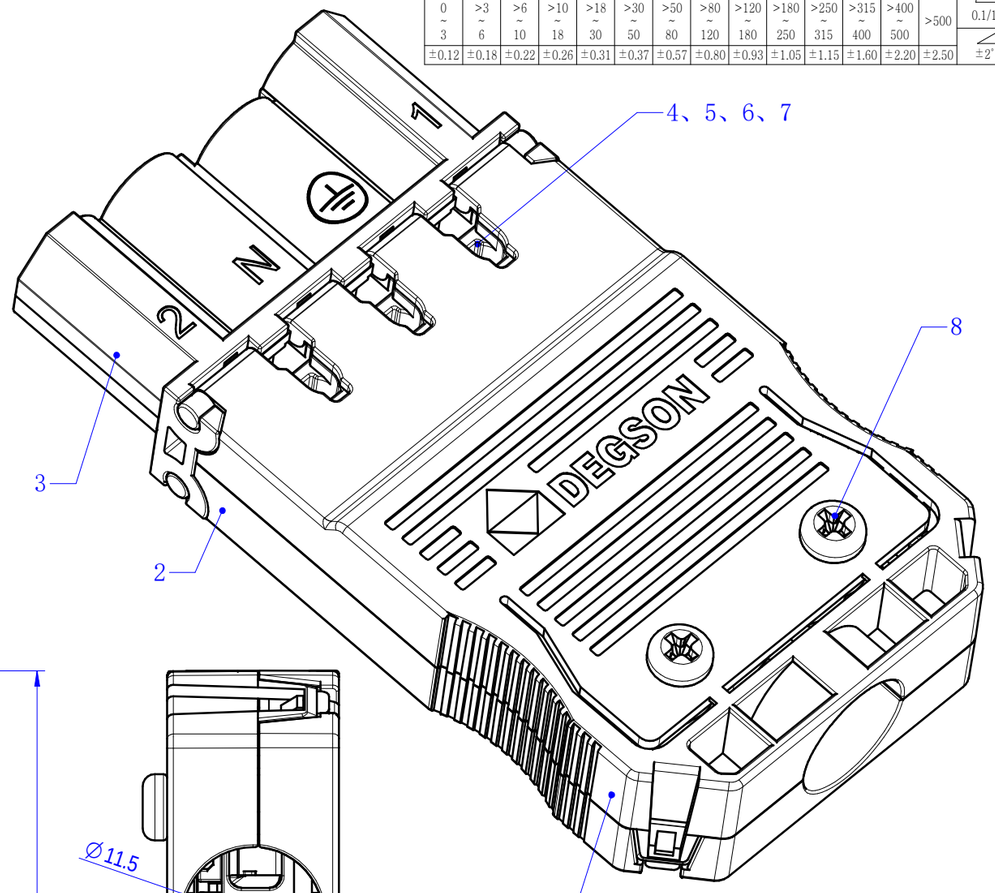

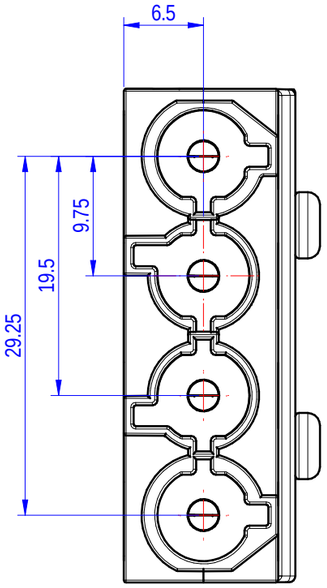

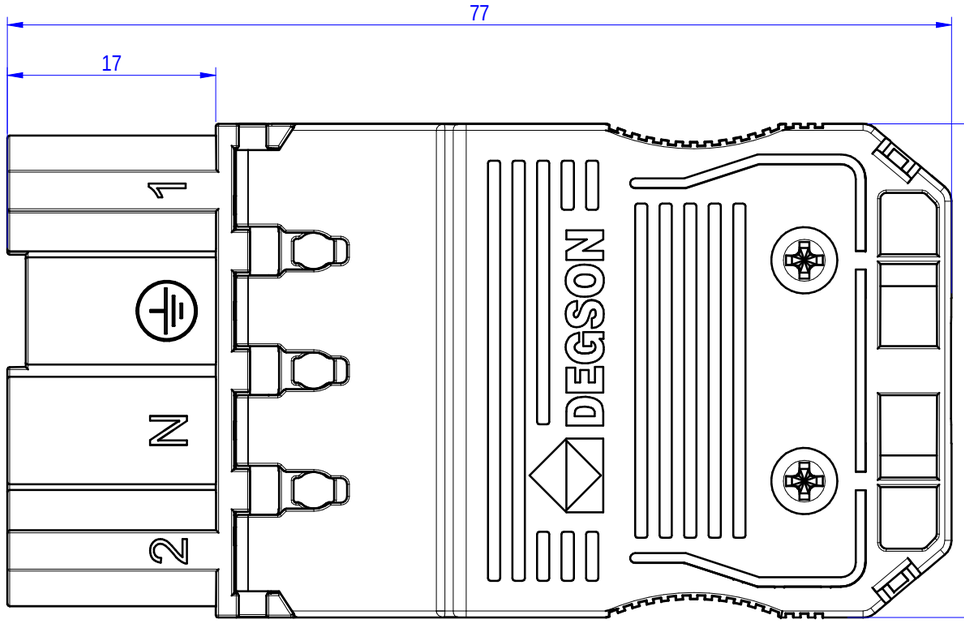

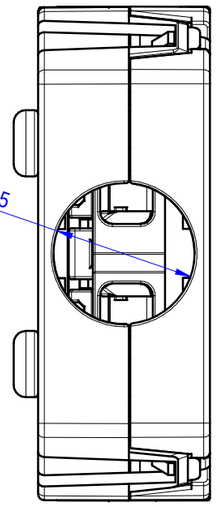

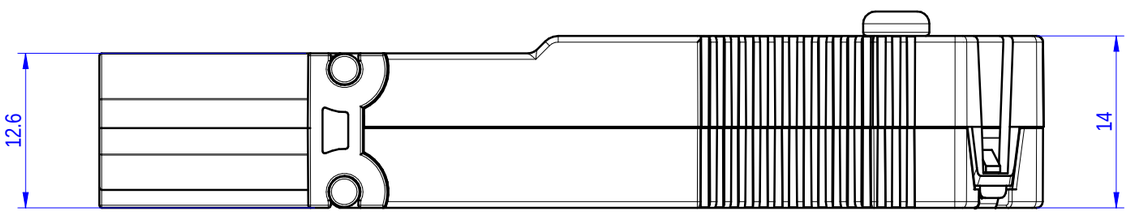

ITEM	NAME OF PART	MATERIAL	NOTES
8	Screw	Steel	Zn plated
7	Button	PA66+GF	UL94V-0
6	Spring	Stainless steel	/
5	Male pin	Copper alloy	Sn Plated
4	Cover	PA66+GF	UL94V-0
3	Housing	PA66+GF	UL94V-0
2	Bottom cover	PA66	UL94V-0
1	Top cover	PA66	UL94V-0

UL 标准/UL Standard: (UL1977)	
额定电压/电流/Rated Voltage(V)/Current(A)	600V/20A
IEC 标准/IEC Standard:(IEC61535)	
额定电压/电流/Rated Voltage(V)/Current(A)	250/400V,32A
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4
螺丝扭矩/Torque Tightening(N·m/Lb.in)	ST2.9, 1.0/8.8
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~12 / 0.5~4
间距/Pitch(mm)/线数范围/Poles	9.75/N=04P
剥线长度/Stripping length(mm)	10~11
使用温度范围/Operating temperature(°C)	-40~+105

REV	ECN	DESCRIPTION	DRFT	DATE
00	/		汪德荣	2025.05.12

DEGSON

APPD:	蓝贵凡	2025.05.12
CHKD:	朱伟明	2025.05.12
DRFT:	汪德荣	2025.05.12

A3 mm (inch)

MATERIAL: / SURFACE/COLOR: /

MAT NO./REV: / /00 MAT STATUS: /

NAME: DGBSC-PG01M/4-04P-1Y-00Z(H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200344633	CUSTOMER DRAWING	/	2:1	1/1