

H

G

F

E

D

C

B

A

H

G

F




E

D

C



B

A

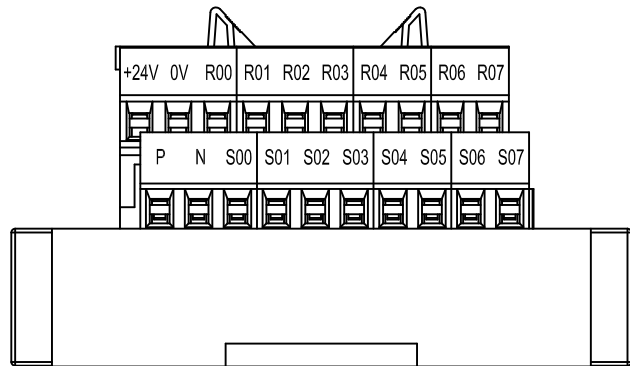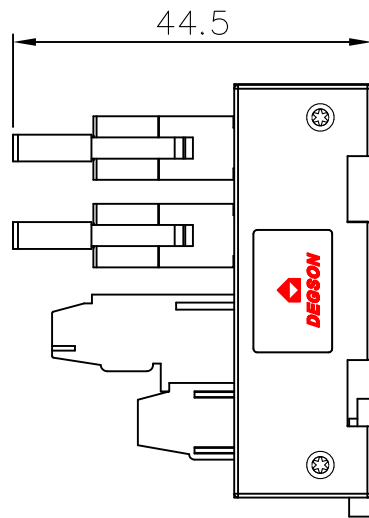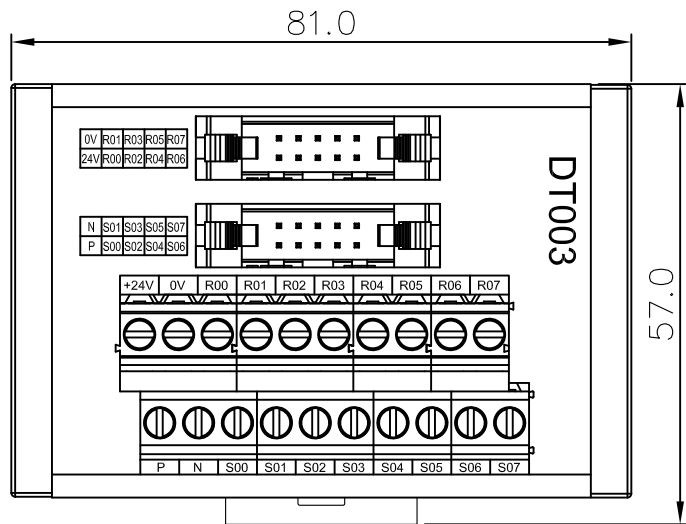

Specifications	
Rated voltage	DC24V
Rated current	1A
Status display	no
Connector digits	20-20
Stripping Length	7mm
Terminal torque	0.4Nm (3.54Lb-In)
Input port/wire diameter	IDC 10P
Output port/wire diameter	DG500-5.08/ 1.0-2.5mm ² /24-12AWG;
Temperature range	- 25℃ ~ +70℃
Installation Method	35mmDIN

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

DETACHED LISTS	PART NO.:	<div> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD</div>			
	APPD:	NAME: DT003-00A(H)			
	CHKD:				
	DRFT:	TITLE: ASSEMBLY DRAWING		REV	
	<div> THIRD ANGLE PROJECTION</div>	DRAWING NO.: 30000052		SHEET	1/1
<div><div>← MM (INCH) →</div>DO NOT SCALE DRAWING</div>		SCALE	1:1		