





REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

H

G

F

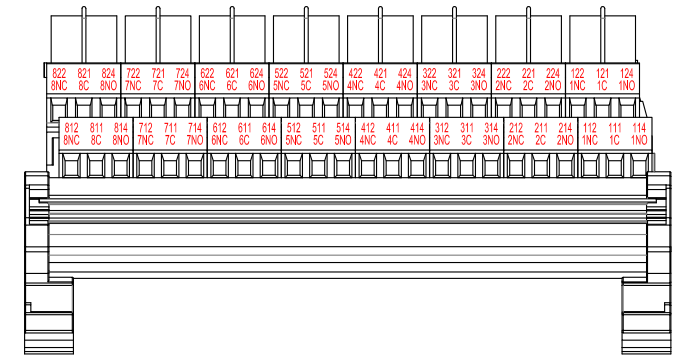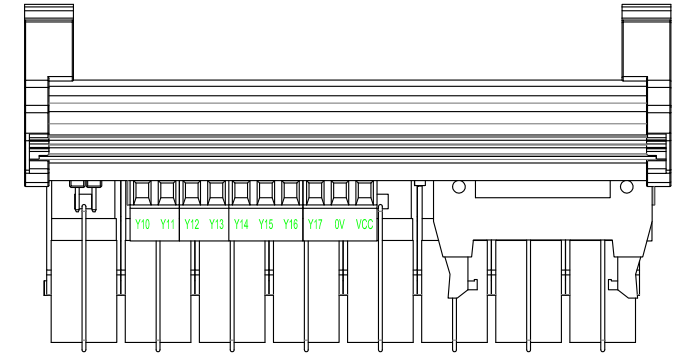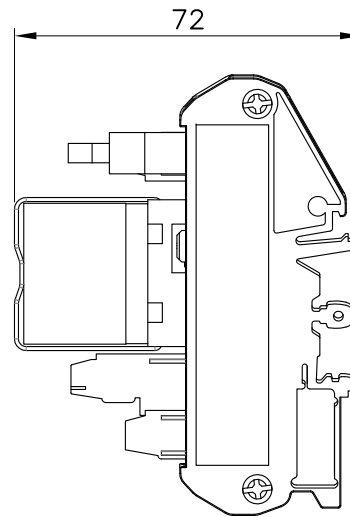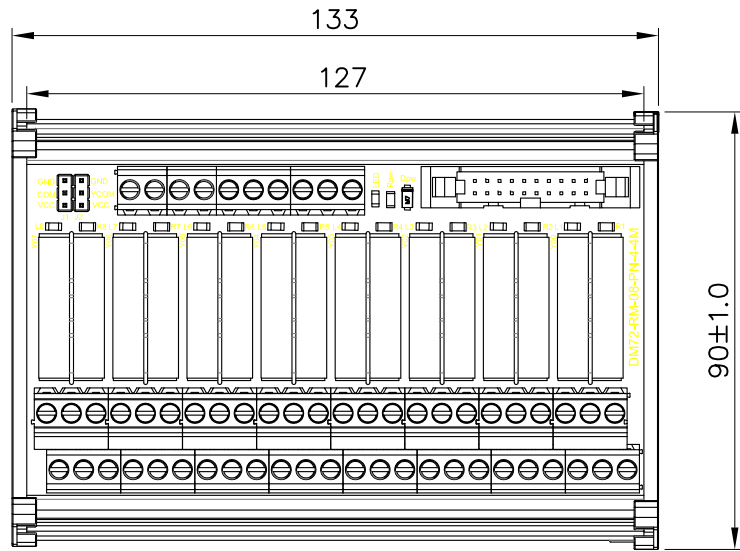

Specifications

Rated voltage	DC24V
Rated current	22mA
Output Voltage	250V/AC,30V/DC;
output current	5A
contact structure	2C0
Model	8
Signal input method	PNP+NPN
Mechanical life	AC≥10 ⁷ , DC≥2x10 ⁷ ;
Electrical life	≥10 ⁵
Temperature range	- 20℃ ~ +55℃
Status Indicator	YES
Connector digits	IDC20P
Stripping Length	6-7mm
Terminal torque	0.4Nm (3.54Lb-In)
Input port/wire diameter	DG500-5.08/1.0-2.5mm ² /24-12AWG
Output port/wire diameter	DG500-5.08/1.0-2.5mm ² /24-12AWG
Installation Method	35mmDIN

8

7

6

5

4

3

2

1

H

G

F



E

D

C

B

A

PART NO.: DM72RM08PN44M01AH	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
APPD:	NAME: DM72-RM-08-PN-4-4M-01A(H)			
CHKD:				
DRFT: LZM	TITLE: ASSEMBLY DRAWING	REV	T0-1	
 THIRD ANGLE PROJECTION	DRAWING NO.: DM72-RM-E33	SHEET	1/1	
	← MM (INCH) →	DO NOT SCALE DRAWING	SCALE	1:1

THIRD ANGLE PROJECTION

← MM (INCH) →

DO NOT SCALE DRAWING

SCALE 1:1