
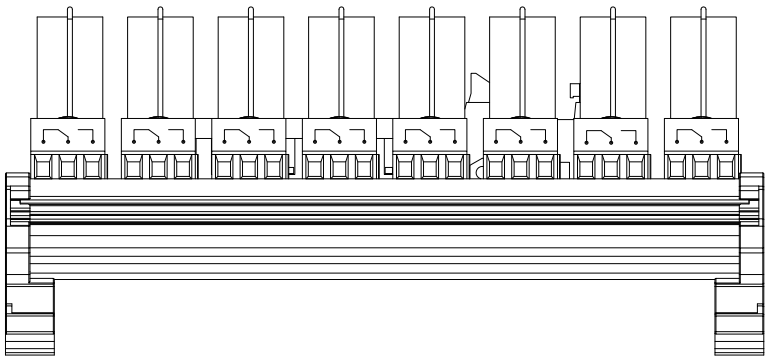
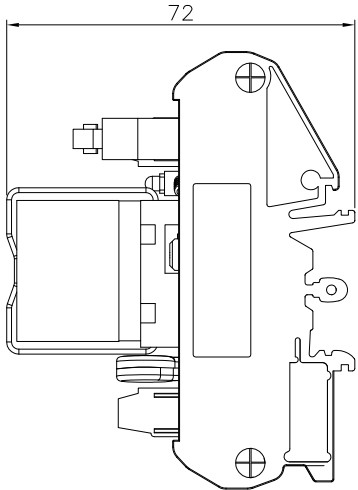
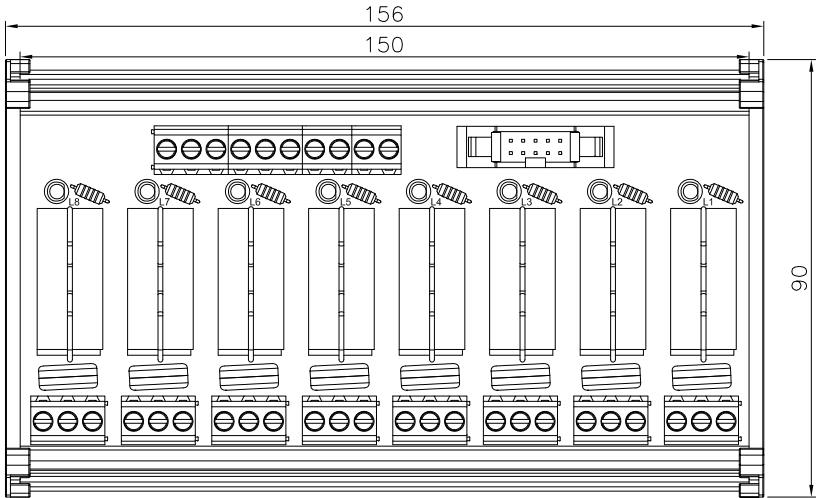




REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

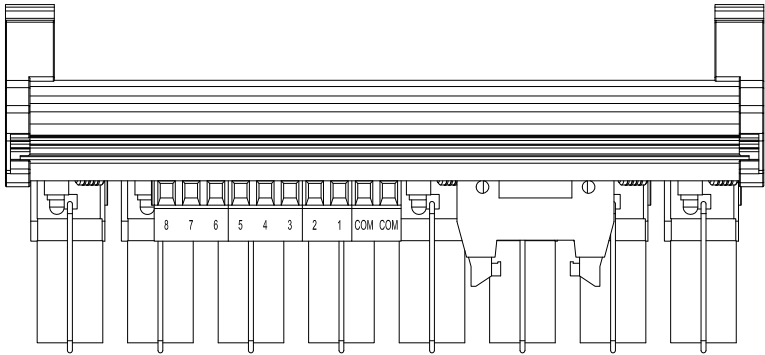

Specifications

Rated voltage	DC24V
Rated current	22mA
Output Voltage	250V/AC,30V/DC;
output current	16A
contact structure	1CO
Model	8
Signal Input method	PNP+NPN
Mechanical life	AC $\geq 10^7$ , DC $\geq 2 \times 10^7$ ;
Electrical life	$\geq 10^5$
Temperature range	- 25℃ ~ +55℃
Status Indicator	YES
Connector digits	/
Stripping Length	6~7mm
Terminal torque	0.4Nm (3.54Lb-In)
Input port/wire diameter	DG500~5.08/1.0~2.5mm <sup>2</sup> /24~12AWG
Output port/wire diameter	DG500~5.08/1.0~2.5mm <sup>2</sup> /24~12AWG
Installation Method	35mmDIN

PART NO.:	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
APPD:	NAME:			
CHKD:	DM72-RM-08-PN-2-4I-0XA(H)			
DRFT:	TITLE: ASSEMBLY DRAWING		REV	
 THIRD ANGLE PROJECTION		DRAWING NO.: DM72-RM-E06	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1