
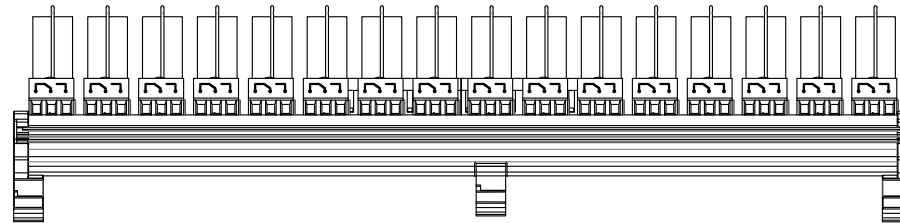

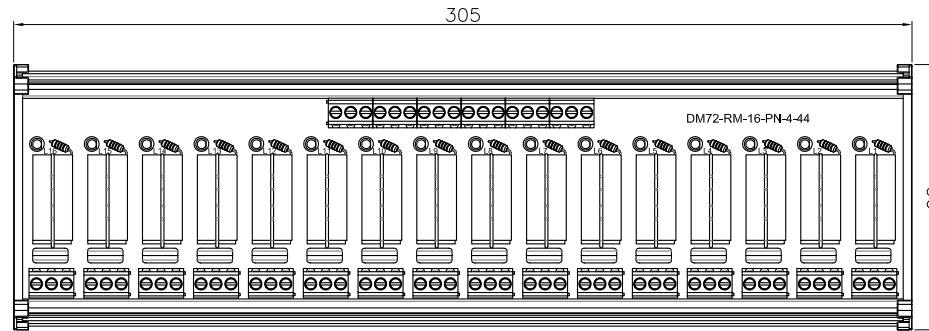


REVISION RECORD

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|------|------|
|-----|-----|-------------|------|------|

A: Proportion: 2: 1

| | | | | | | | | | | | | | | | | | |
|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|-----|-----|
| 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | COM | COM |
|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|-----|-----|

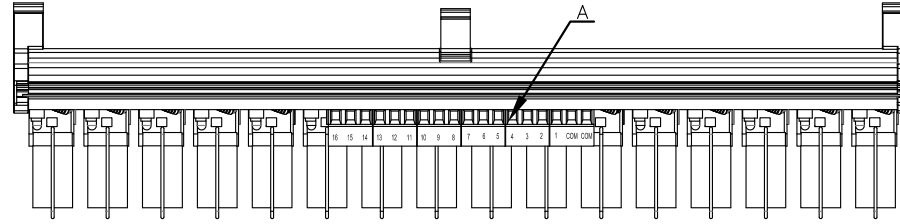

Specifications

| | |
|---------------------------|---|
| Rated voltage | DC24V |
| Rated current | 22mA |
| Output Voltage | 250V/AC,30V/DC; |
| output current | 16A |
| contact structure | 1CO |
| Model | 16 |
| Signal input method | PNP+NPN |
| Mechanical life | AC $\geq 10^7$, DC $\geq 2 \times 10^7$; |
| Electrical life | $\geq 10^5$ |
| Temperature range | - 25℃ ~ +55℃ |
| Status Indicator | YES |
| Connector digits | / |
| Stripping Length | 6-7mm |
| Terminal torque | 0.4Nm (3.54Lb-In) |
| Input port/wire diameter | DG500-5.08/1.0-2.5mm ² /24-12AWG |
| Output port/wire diameter | DG500-5.08/1.0-2.5mm ² /24-12AWG |
| Installation Method | 35mmDIN |

| | | | | |
|----------------------------|-----------|---|----------------------|------------------|
| DETACHED LISTS | PART NO.: | 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD | | |
| | APPD: | NAME: DM72-RM-16-PN-2-44-10XA(H) | | |
| | CHKD: | TITLE: ASSEMBLY DRAWING | | |
| | DRFT: | DRAWING NO.: DM72-RM-E17 | REV | |
| THIRD ANGLE PROJECTION | | DRAWING NO.: | DM72-RM-E17 | SHEET 1/1 |
| | | MM (INCH) | DO NOT SCALE DRAWING | SCALE 1:1 |