
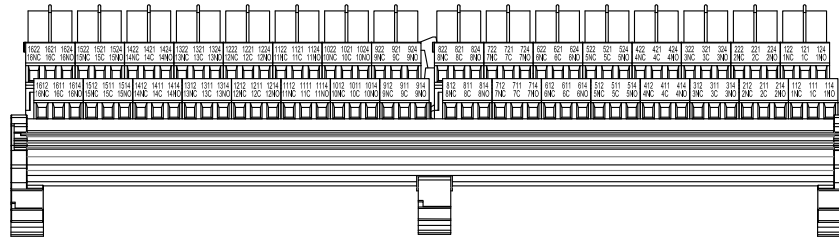
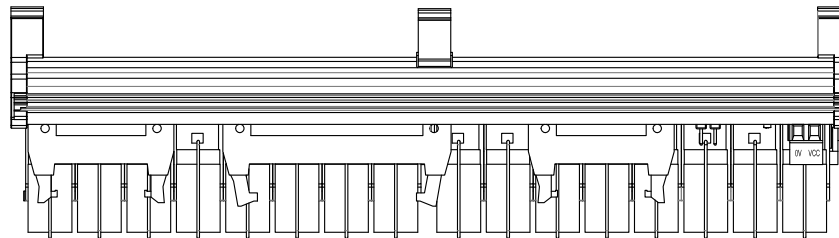
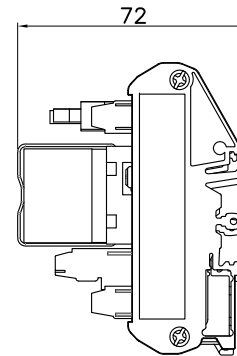




REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

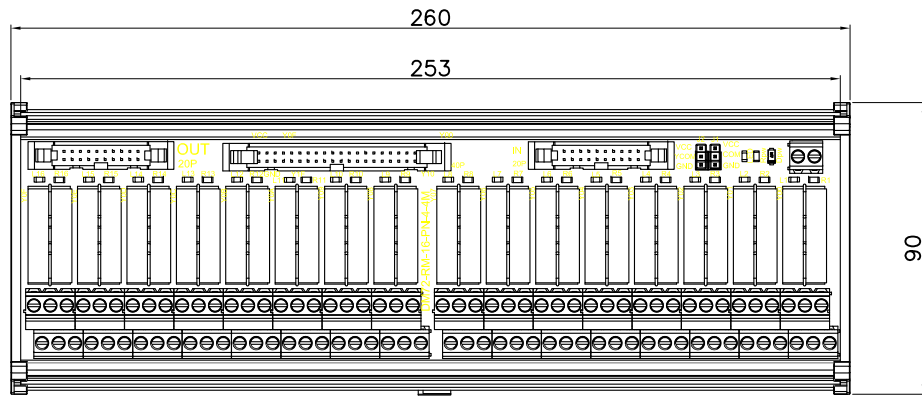

Specifications

Rated voltage	DC24V
Rated current	22mA
Output Voltage	250V/AC,30V/DC;
output current	16A
contact structure	2CO
Model	16
Signal input method	PNP+NPN
Mechanical life	AC $\geq 10^7$ , DC $\geq 2 \times 10^7$ ;
Electrical life	$\geq 10^5$
Temperature range	- 25℃ ~ +55℃
Status Indicator	YES
Connector digits	IDC20P/IDC40P
Stripping Length	6-7mm
Terminal torque	0.4Nm (3.54Lb-In)
Input port/wire diameter	DG500-5.08/1.0-2.5mm <sup>2</sup> /24-12AWG
Output port/wire diameter	DG500-5.08/1.0-2.5mm <sup>2</sup> /24-12AWG
Installation Method	35mmDIN

PART NO.:	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
APPD:	NAME: DM72-RM-16-PN-4-4M-0XA(H)			
CHKD:				
DRFT:	TITLE: ASSEMBLY DRAWING	REV	T0-1	
 THIRD ANGLE PROJECTION	DRAWING NO.:	30000011	SHEET	1/1
	MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1