
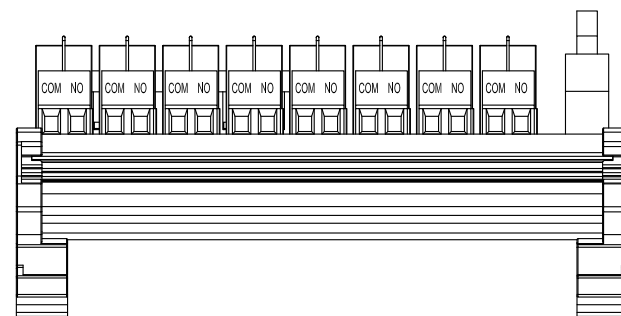
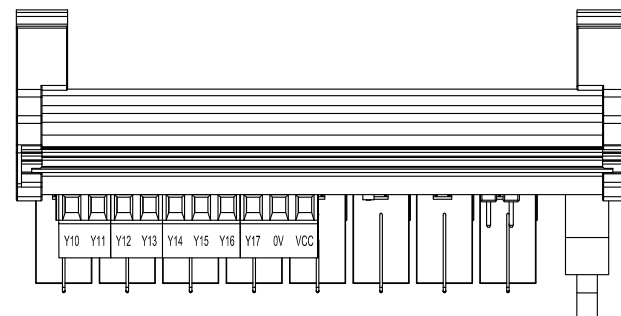
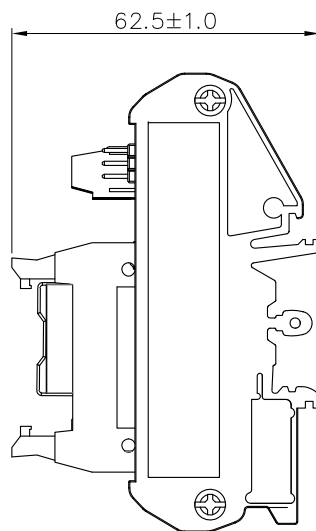




REVISION RECORD

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|------|------|
| | | | | |

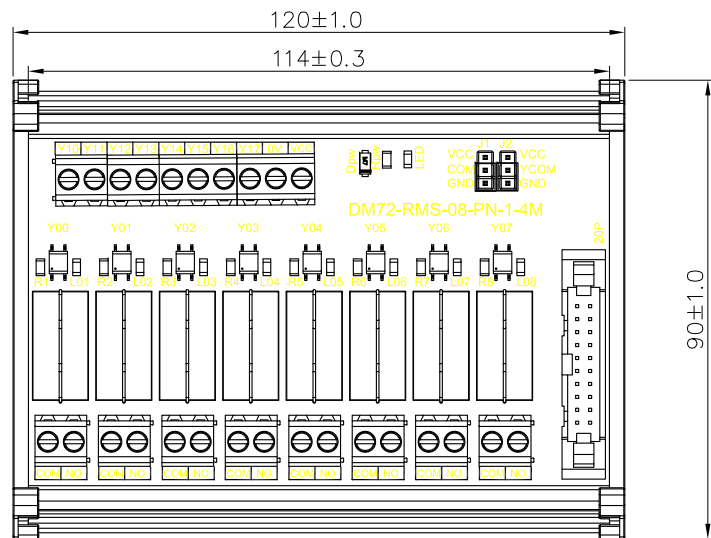

Specifications

| | |
|---------------------------|---|
| Rated voltage | DC24V |
| Rated current | 22mA |
| Output Voltage | 250V/AC,30V/DC; |
| output current | 10A |
| contact structure | 1NO |
| Model | 8 |
| Signal input method | PNP+NPN |
| Mechanical life | AC≥10 ⁷ , DC≥2x10 ⁷ ; |
| Electrical life | ≥10 ⁵ |
| Temperature range | - 20℃ ~ +70℃ |
| Status Indicator | YES |
| Connector digits | IDC 20P |
| Stripping Length | 6-7mm |
| Terminal torque | 0.4Nm (3.54Lb-In) |
| Input port/wire diameter | DG500-5.08/1.0-2.5mm ² /24-12AWG/IDC 20P |
| Output port/wire diameter | DG500-5.08/1.0-2.5mm ² /24-12AWG |
| Installation Method | 35mmDIN |

| | | | | |
|---|---|----------------------|-------|-----|
| PART NO.: |  宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD | | | |
| APPD: | NAME: | | | |
| CHKD: | DM72-RMS-08-PN-1-4M-0XA(H) | | | |
| DRFT: LZM | TITLE: ASSEMBLY DRAWING | REV | T0 | |
|  THIRD ANGLE PROJECTION | DRAWING NO.: | 30000015 | SHEET | 1/1 |
| | MM (INCH) | DO NOT SCALE DRAWING | SCALE | 1:1 |