
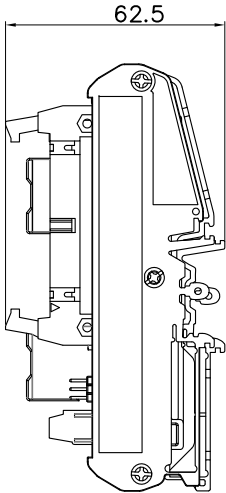



REVISION RECORD



REV	ECN	DESCRIPTION	DRFT	DATE

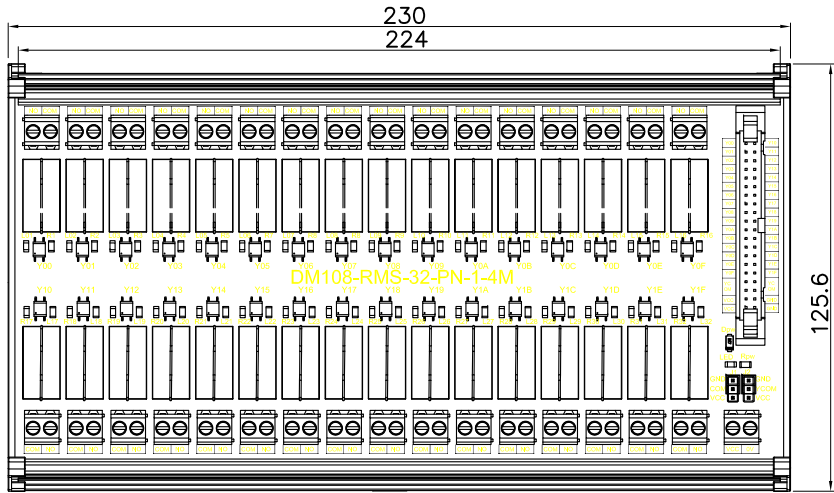

Specifications

Rated voltage	DC24V
Rated current	22mA
Output Voltage	250V/AC,30V/DC;
output current	10A
contact structure	1NO
Model	32
Signal input method	PNP+NPN
Mechanical life	≥10 ⁷
Electrical life	≥10 ⁵
Temperature range	- 20℃ ~ +70℃
Status Indicator	YES
Connector digits	IDC 40P
Stripping Length	6-7mm
Terminal torque	0.4Nm (3.54Lb-In)
Input port/wire diameter	IDC 40P
Output port/wire diameter	DG500-5.08/1.0-2.5mm ² /24-12AWG
Installation Method	35mmDIN

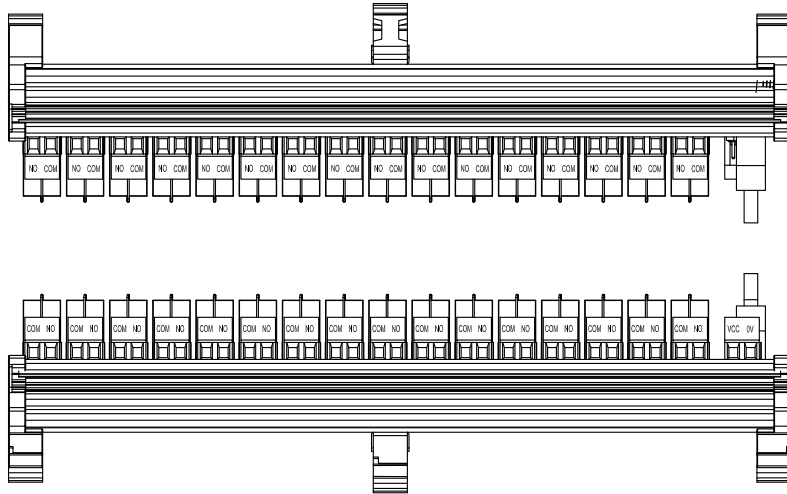

PART NO.:	<div> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD</div>			
APPD:	NAME: DM108-RMS-32-PN-1-4M-0XA(H)			
CHKD:				
DRFT: LZM	TITLE: ASSEMBLY DRAWING	REV	T0	
 THIRD ANGLE PROJECTION	DRAWING NO.: 30000017	SHEET	1/1	
	MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1