
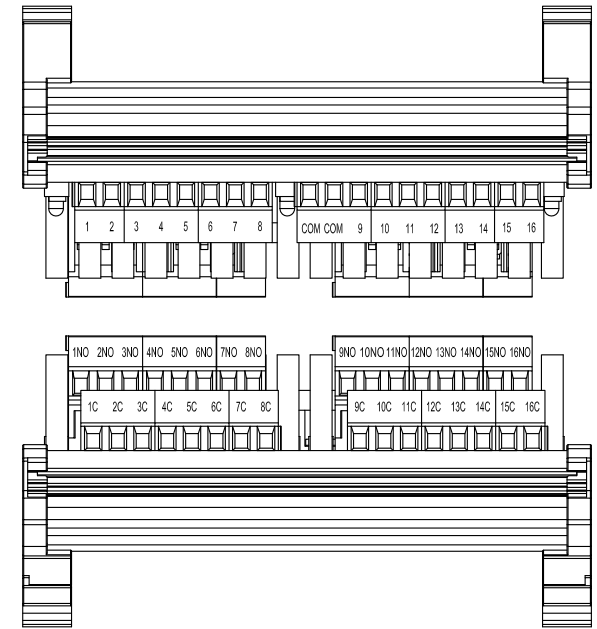
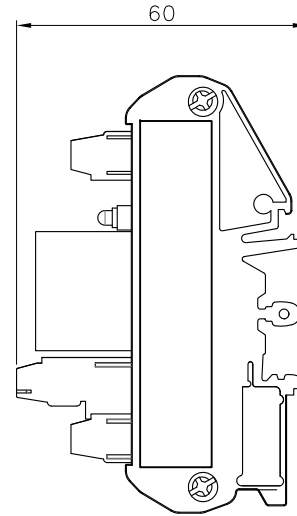


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

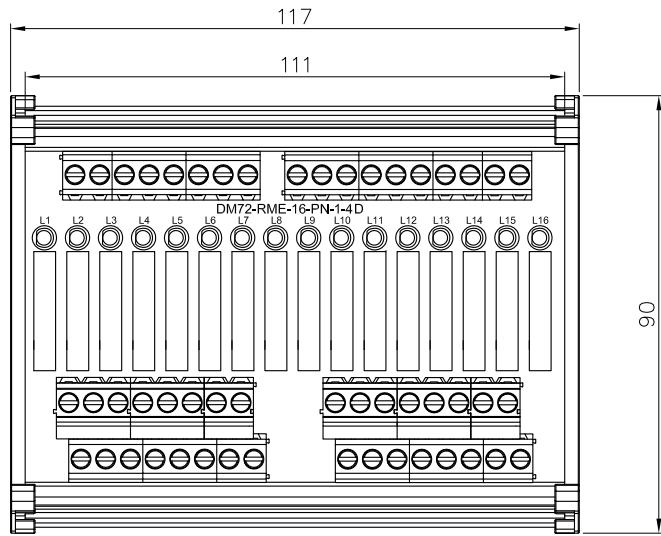

Specifications

Rated voltage	DC20-28V
Rated current	5~10mA
Output Voltage	AC/DC60V;
output current	2.7A
contact structure	1NO
Model	16
Signal input method	PNP+NPN
Temperature range	- 25℃ ~ +55℃
Status Indicator	YES
Connector digits	/
Stripping Length	6-7mm
Terminal torque	0.4Nm (3.54Lb-In)
Input port/wire diameter	DG500-5.08/1.0-2.5mm ² /24-12AWG
Output port/wire diameter	DG500-5.08/1.0-2.5mm ² /24-12AWG
Installation Method	35mmDIN

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: DM72-RME-16-PN-1-4D-XXA(H)		
	CHKD:	TITLE: ASSEMBLY DRAWING		
	DRFT:	TITLE: ASSEMBLY DRAWING	REV	
 THIRD ANGLE PROJECTION		DRAWING NO.:	DM72-RME-E06	SHEET 1/1
		 MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1