

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:





Specifications  
 DIN EN 60 664-1  
 DIN EN 61 984

Inserts

- 01. Number of contacts :4+PE
- 02. Rated Current :10A
- 03. Rated Voltage conductor-ground :230V
- 04. Rated Voltage conductor-conductor :400V
- 05. Pollution degree :3
- 06. Rated impulse voltage :4kv
- 07. or:10A/250V/4kV/3
- 08. Insulation resistance :  $\geq 10^9 \Omega$
- 09. Material:Polycarbonate
- 10. Colour:RAL 7032(Light grey)
- 11. Rated voltage acc. to UL/GSA:600V
- 12. Limiting temperatures : -40°C~+125°C
- 13. Flammability acc. to UL94:V0
- 14. Mechanical working life (mating cycles) :  $\geq 500$

Contacts

- 01. Material:Copper alloy
- 02. Surface:hard-silver plated
- 03. Contact resistance :  $\leq 3m\Omega$
- 04. Terminal :Cage-clamp
- 05. Wire gauge :0.2-2.5mm<sup>2</sup> (AWG 26-14)
- 06. Stripping length :9.0mm
- 07. Rohs Compliance

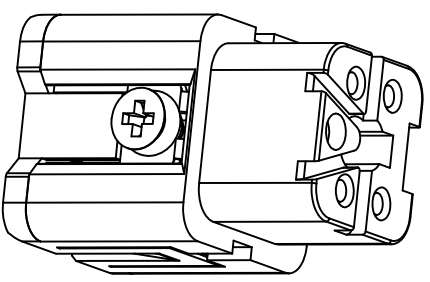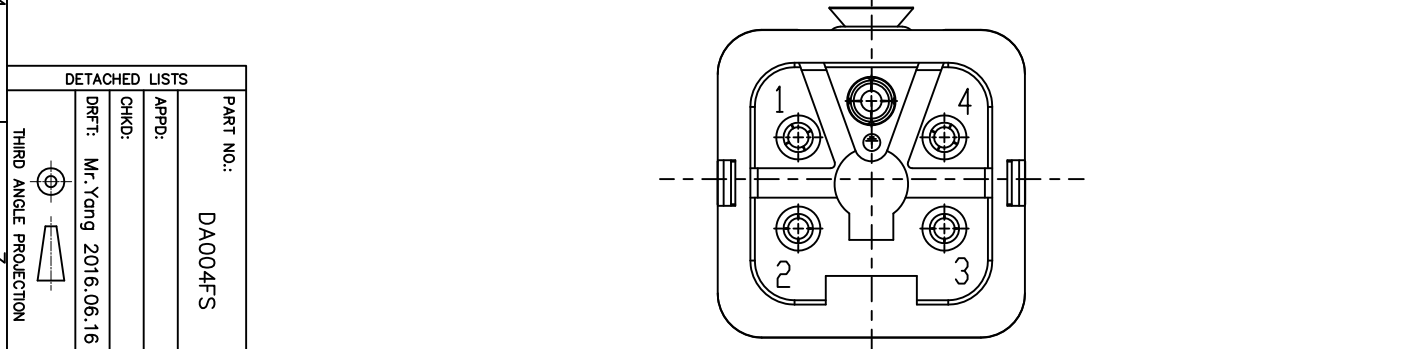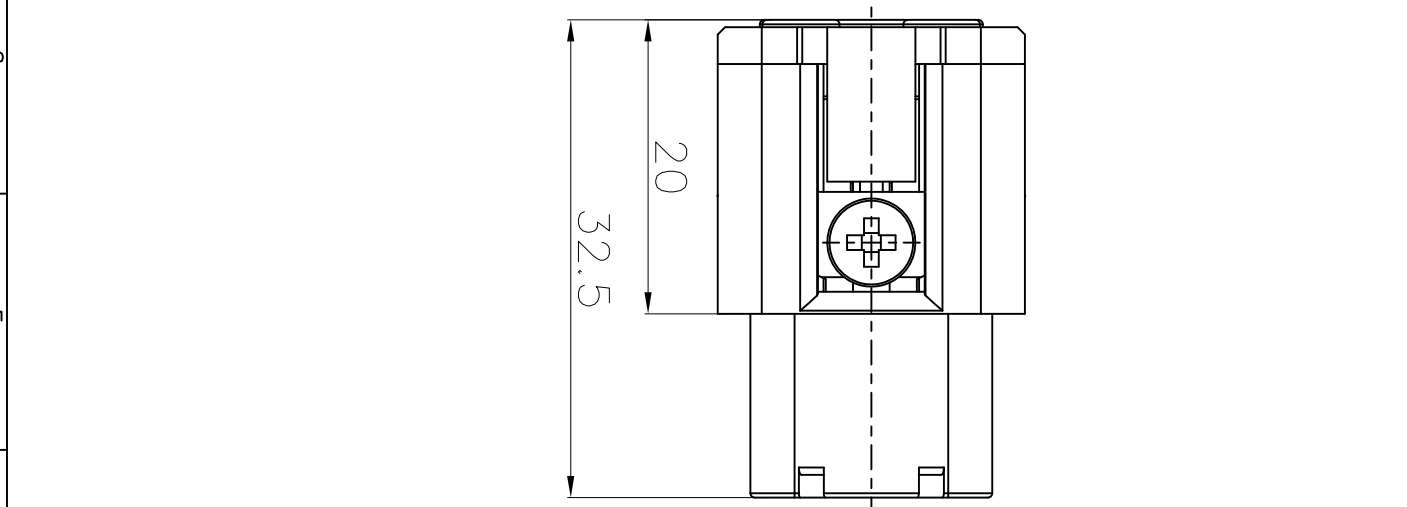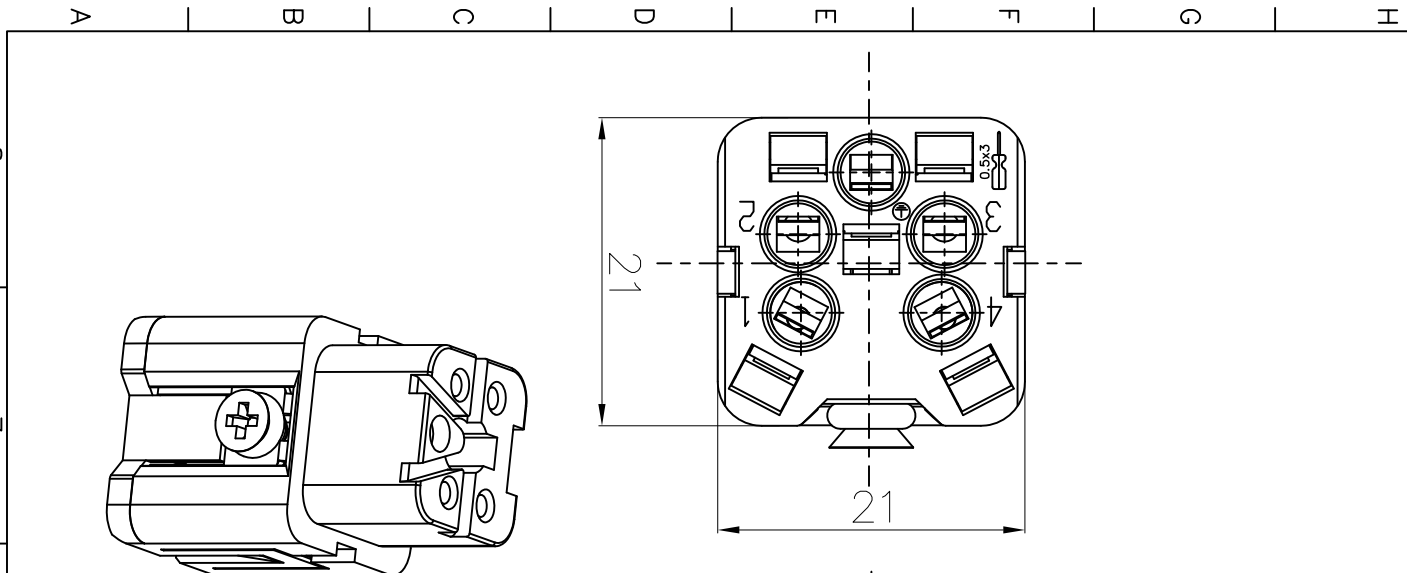

DETACHED LISTS			
PART NO.:	DA004FS		
APPD:		NAME: DA-004-FS	
CHKD:			
DRFT:	Mr. Yang 2016.06.16	TITLE: CUSTOMER DRAWING	
 THIRD ANGLE PROJECTION		 DO NOT SCALE DRAWING	REV: DO-1 SHEET: 1/1 SCALE: 2:1

A 8 7 6 5 4 3 2 1